D5G

Track-Type Tractors



Engine		
Model	3046 T	
Power - Gross	74 kW	99 hp
Power - Net	67 kW	90 hp
Weights		
Operating Weight - XL	8904 kg	19,630 lb
Operating Weight - LGP	9254 kg	20,402 lb

- Operating with dozer blade, canopy ROPS, back-up alarm, operator, coolant, lubricants and full fuel tank.

D5G Track-Type Tractors

Introducing the new D5G Track-Type Tractor - designed for all of your heavy construction needs.

Operator Station

✔ The redesigned operator station is quieter and more spacious for a comfortable work environment. Excellent sightlines to the work area help keep operator fatigue low and production up throughout the workday. Improved ergonomic design further enhances operator comfort. **pg. 4**

Visibility

Overall visibility has been significantly improved to enhance productivity and work quality. With 13% more glass area than the previous C-Series models and no obstructions, the D5G has a good view to the blade as well as an excellent peripheral view. **pg. 6**

Styling

✔ Updated appearance of the new G-Series machines provides the look you're proud to have on your jobsite! **pg. 7**

Attachments

✔ The new parallelogram ripper and hydrostatic winch make the D5G even more productive on your jobsite. **pg. 11**

Blade and Mainframe

A Variable Pitch, Power Angle and Tilt (VPAT) blade is available on all G-Series machines. Rugged construction and powerful hydraulics provide excellent down force, pry-out force and blade control for maximum productivity. **pg. 12**

The new D5G combines the power of a larger tractor with the versatility and maneuverability of a smaller machine in one package to meet a wide range of job applications. With its comfortable operator station, excellent visibility and simple joystick control, the D5G is everything you expect from Caterpillar® and more!



Engine

The proven six-cylinder Caterpillar 3046 engine provides plenty of lugging power. The 3046 T Turbocharged version is used on the D5G. These engines provide smooth, responsive power, excellent fuel economy and lasting reliability. **pg. 8**

Hydrostatic Transmission Control

✔ Simple joystick control eases operation and provides track counterrotation. Due to the machine's nimble control, the operator has a better feel for the machine's capabilities and can maneuver more easily. **pg. 9**

Undercarriage with Rotating Bushing Track Option

Rotating Bushing Track option eliminates the need to turn pins and bushings, significantly reducing owning and operating costs. Rugged design and proven structural manufacturing assure outstanding durability. **pg. 10**



Hydrostatic Winch

✔ Providing infinitely variable line speed while delivering superior line pull, this new winch improves control for better modulation. Caterpillar is the first to produce a hydrostatic winch for machines in the under 100 hp class. **pg. 14**

Serviceability and Customer Support

Your Cat dealer offers a wide range of services that can be set up under a customer support agreement when you purchase your equipment. Your dealer will help you choose a plan that can cover everything from machine and attachment selection to replacement. **pg. 16**

✔ *New Feature*

Operator Station

The redesigned operator station is quieter and more spacious for a comfortable work environment.



Redesigned Operator Station. Based on the cab designs of the large Caterpillar track-type tractors, the operator station has been redesigned to be more spacious. The new ergonomic layout emphasizes simplicity, ease of use and comfort. A new climate control system (HVAC), increased leg room and enhanced visibility allow the operator to focus on the job. With 13% more tinted glass area, the operator station provides a clear view to the blade and the surrounding work site.

Other Cab Conveniences.

- Vertical & horizontal armrest adjustments
- Directed air vents in key locations
- Wide angle rear view mirror
- Cupholder
- 12 volt power port
- Radio ready factory installed components including speakers, antenna and all wiring brackets
- Dome light
- Coat hook
- Tie down for lunch box
- Air conditioner (standard equipment)

Reduced Sound Levels. Sound levels are greatly reduced to further enhance the operator's comfort.



VPAT Dozer Control. A single lever control handle is used to control all blade lift, angle and tilt functions. The ergonomically designed handle fits comfortably in the operator's hand and delivers superb grading results.



Ease of Entry and Exit. The hexagon shaped cab provides plenty of space to enter the roomy operator compartment. Easy to reach door handles make it easy to enter and exit during the workday. Angled doors allow the operator to walk right into the cab.



Seat. The Caterpillar Comfort Suspension seat (option) provides adjustable positioning to fit any operator. It is the most comfortable seat in the industry and features:

- 3" wide retractable seatbelt
- Fore/aft positioning
- Back cushion angle adjustment
- Seat cushion tilt
- Back rest extension
- Lumbar adjustment
- Height adjustment
- Cloth seat is standard with cab; vinyl seat is available on open canopy machines

Standard suspension vinyl seat provides basic support.

Decel Pedal. Decelerator allows operator to modulate ground speed effortlessly. Intuitive control enhances operator confidence when maneuvering in and around structures.



Monitoring Package. The new monitoring package allows the operator to be aware of system conditions without having to constantly view gauges. Fuel level, hydraulic oil temperature, oil pressure, coolant temperature, and maximum speed setting gauges are all included in the instrument panel. Indicator lamps warn operator of:


- Low oil pressure
- Power train oil filter bypass
- Low alternator voltage
- Parking brake engaged
- Electronic control fault

Other Features.

- Footrests (dash mounted and adjustable floor mounted) for operator comfort and stability
- New wet arm wipers on the front and rear windshield
- Vandalism guard to protect the dash and instruments from damage (canopy machines only)

Visibility

The key to great grading is excellent visibility, and we deliver.

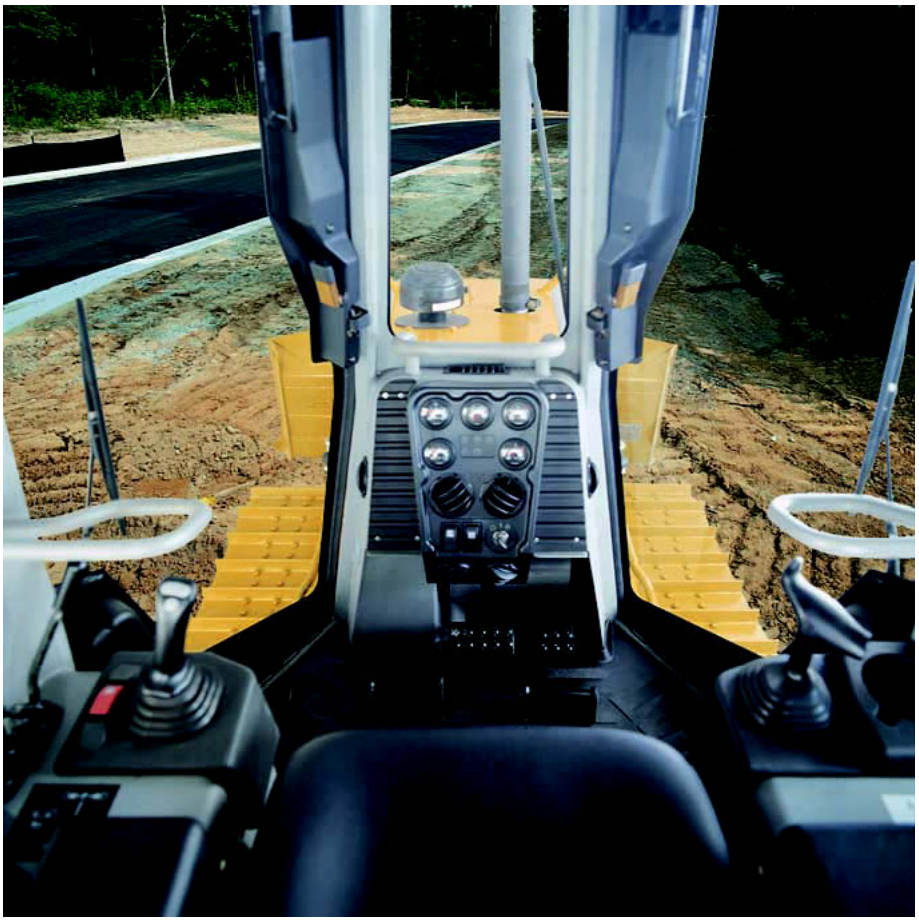

Angled Doors. Angled doors on the left and right hand sides provide virtually unrestricted visibility to the sides of the machine.



Excellent Line of Sight to Blade. Grade stakes and utility structures are easy to see and maneuver around with the G-Series tractors.

Excellent Visibility. Visibility is key to productive grading. The D5G delivers excellent visibility to the blade corners and edges. No longer does an operator have to grade by feel. He can easily see blade corners and cutting edges. Wide open peripheral vision allows the operator to have an optimum view of the jobsite.

Windows. Large tinted windows provide excellent visibility to the blade and surrounding work site. Large, sliding side windows provide flow-through ventilation. With 13% more glass area, the operator station delivers an outstanding view all around the machine.

Styling

Step up to a new machine. The G-Series machines have a new look, one that will have everyone eager to operate them.



Updated Look. The G-Series machines feature a new, more appealing look with rounder corners, new operator compartment and a sleeker shape.





Solid Machine. The new G-Series machines are solid tractors that are well-equipped. From the hexagon shaped cab which originated on large Caterpillar track-type tractors to the sleek, narrow hood, the D5G combines eye-catching styling with solid, reliable performance.

Engine

The well-proven Caterpillar 3046 six-cylinder engine provides smooth, responsive power, excellent fuel economy and lasting reliability.



Caterpillar 3046 Diesel Engine. Designed specifically for small to medium size earthmoving machines, the Cat six-cylinder 3046 engine is inherently balanced, providing low vibration, superior performance and exceptional responsiveness. A 25% torque rise at 1400 RPM provides increased lugging force during heavy loads. The D5G is equipped with the powerful turbocharged 3046 T, designed for improved response and performance at lower engine speeds. This is important for earthmoving machines in the under 100 hp size class, allowing operators to work in tight spaces, at part throttle and slower travel speeds without sacrificing responsiveness. The turbocharger also helps reduce fuel consumption and sound levels.

Direct Injection Fuel System. The direct injection fuel system is adjustment free for reduced maintenance. High pressure fuel injection results in reduced fuel consumption and emissions. Electric, internal fuel shut-off solenoid is protected from the elements to provide long life.

Turbocharger. The turbocharger improves response and performance at low to medium engine speeds.

Spin-on Oil and Fuel Filters. Spin-on oil and fuel filters are vertically mounted and easily accessible for faster maintenance.

In-cylinder Glow Plugs. In-cylinder glow plugs deliver dependable starts when operating in cold temperatures. A built-in temperature switch helps ensure lasting reliability.

Lubrication System. Gear driven oil pump provides lubrication from a deep sump oil pan. An efficient, multiple-plate, water-cooled oil cooler prolongs engine and lubricant life.

Cooling System. A large diameter fan and full length, water-cooled cylinders, combined with excellent thermal efficiency, minimize heat rejection, prevent overheating and prolong engine life.

Regulations. The Caterpillar 3046 T engine meets Tier I EPA, MOC and CE regulations.

Hydrostatic Transmission Control

Simple joystick control eases operation and increases productivity.

Simpler Operation, Improved Control. We listened to our customers and designed the new G-Series machines with even simpler operation and improved control. This allows the operator to concentrate on more important aspects of the job such as blade control.

Joystick Control. The joystick control is easy to use. Speed, direction and steering are all controlled with the joystick. The result is easier operation and improved productivity. Ergonomic placement reduces operator effort and fatigue.

Speed and Direction. The joystick has three simple detented positions for travel: forward, reverse and neutral. A new feature is the capability to utilize faster reverse speed as a percentage of forward speed for increased productivity. Two joystick-mounted buttons are used to infinitely increase and decrease speed. An indicator on the dash displays the tractor's current operating speed setting. When the joystick is moved to the neutral position, the machine stops.

Steering. With the machine moving in forward or reverse, move the joystick to the left to turn the machine to the left; move the joystick to the right to turn right. The more the handle is moved to the right or left, the tighter the turn. Regardless of ground conditions, steering is consistent and predictable. Moving the joystick to the far right or left will make the tracks counterrotate for maneuvering in tight work areas.



Counterrotation. The D5G maneuvers easily through side loading blade applications. Simply engage counter-rotation briefly to correct machine position. Counterrotation also provides easy, quick maneuvering in small, confined work areas.

Tracking. The D5G has excellent tracking capabilities which increase productivity on side slopes.

Powerturn. Utilizing active effort of both tracks during a turn allows for more pushing power at the blade and less spillage of material from the blade.

Undercarriage with Rotating Bushing Track Option

Lowest owning and operating costs are delivered by the Caterpillar exclusive Rotating Bushing Track option.





Cat Exclusive Rotating Bushing Track Option. Available on the D5G, the Caterpillar exclusive Rotating Bushing Track (RBT) increases undercarriage system life and reduces maintenance. Bushings rotate when in contact with the sprocket, removing the need to turn pins and bushings. This reduces downtime, balances component wear, reduces noise and allows components, such as links and bottom rollers, to reach their maximum wear life.

Durable Components. Caterpillar undercarriages are designed for long wear and lower owning and operating costs. Advanced metallurgy processes produce superior wear properties.

Available Configurations. The D5G is available in either an extra long (XL) or low ground pressure (LGP) undercarriage configuration.

XL Undercarriage. Track length is extended on extra long (XL) undercarriages for increased ground contact area and flotation, superior balance and excellent finish grading.


LGP Undercarriage. Low ground pressure (LGP) undercarriage offers a wider track, increasing ground contact area for optimum flotation and stability on sloping and finish grading jobs. As standard equipment, the G-Series LGP undercarriage provides an additional bottom roller versus the C-Series.

Attachments

The new parallelogram ripper and hydrostatic winch make the D5G even more productive on your jobsite.



Parallelogram Ripper. This new, larger tool is more aggressive and allows the operator to do more effective ripper work. Heavy duty design provides long life. Parallel linkage design allows for better penetration and maneuverability in tight working areas. A longer shank delivers more work per pass making the machine more productive.

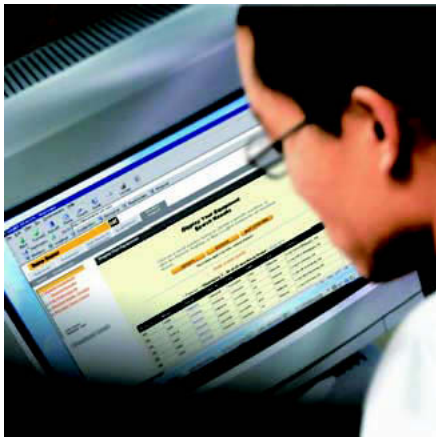




Product Link. This option allows the customer or dealer to obtain machine diagnostics and location from their office, eliminating trips and phone calls. Scheduled service can be completed more efficiently, thus reducing owning and operating costs. The product link provides updates on service meter hours and machine location as well as integrated mapping/route planning.

Hydrostatic Winch. The new Caterpillar exclusive hydrostatic winch provides smooth modulation, infinitely variable speed and better control. With its hydrostatic drive, this winch delivers outstanding results with less operator effort.

Blade and Mainframe

With a 14% increase in blade capacity, the Variable Pitch, Power Angle and Tilt (VPAT) blade is designed and built for unmatched versatility, durability and strength.

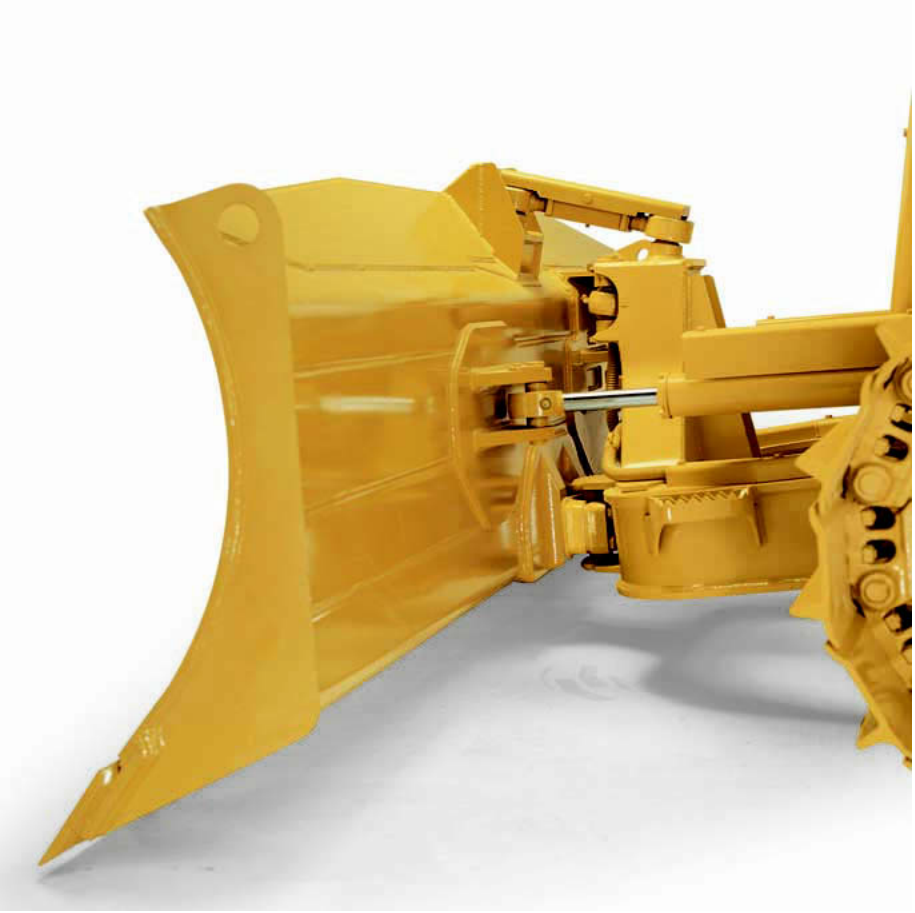



VPAT Blade. The VPAT blade is specifically designed for finish grading, backfilling ditches, cutting V ditches, windrowing, fill spreading, medium land clearing and heavy dozing. VPAT blades are built with four full-width, box-section reinforcement cells for unmatched strength and durability.

Increased Blade Capacity. Blade capacity has been increased by 14% to greatly improve productivity.




Larger Trunnion. The blade trunnion ball size has been increased to provide longer life of the trunnion and reduce owning and operating costs. The trunnion is also now mounted on the C-frame instead of the blade.

Adjustable Top Pitch Link. The adjustable top pitch link provides a solid link between the blade and the top of the tilt tower on the C-frame. The turn buckle top pitch link allows the blade pitch to be adjusted without the use of tools. The cutting edge position can be adjusted between 50 and 55 degrees. The pitch link cover has been redesigned to provide better retention.



Improved Pin Joints. Pin joints have been improved to be more durable and provide longer life. Remote lubrication points provide easier service.

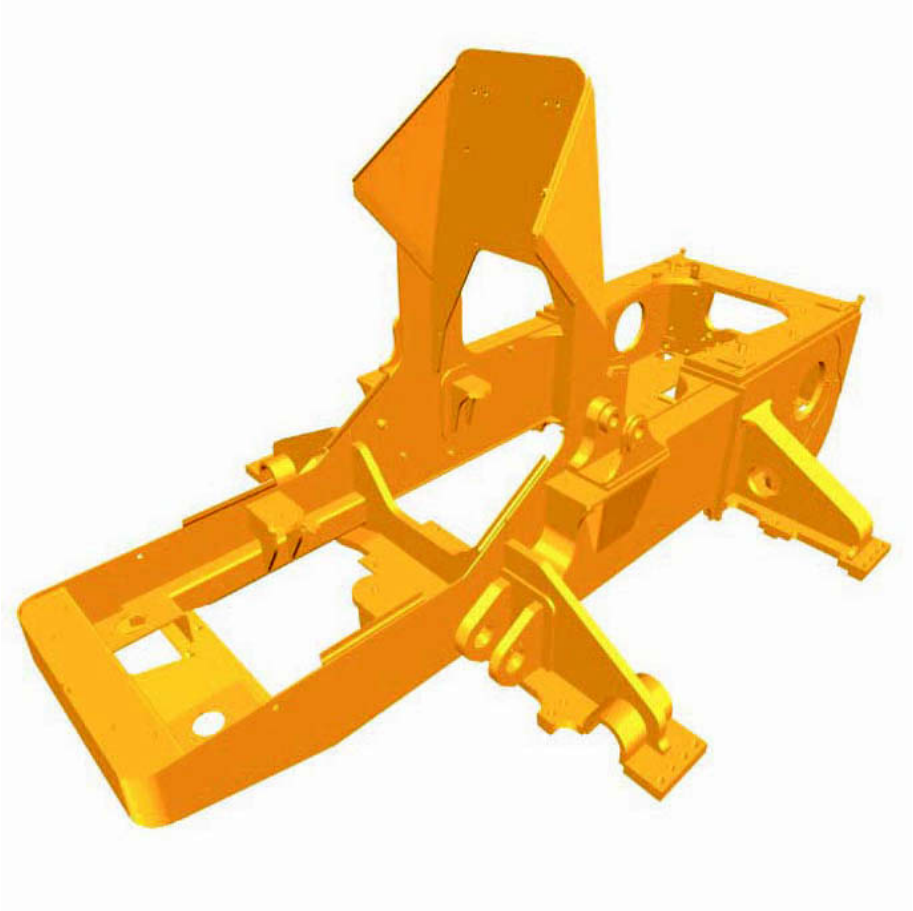


One-Piece Mainframe. Modeled after the large Caterpillar track-type tractors, the mainframe provides a solid back bone for handling forces generated during tough dozing. The robotic welding process delivers reliability and durability throughout the life of the machine.

Hydrostatic Winch

Providing high line pull and high line speed, this new winch improves control for better modulation.



Winch. Previous mechanical winches were driven by shafts and controlled by brakes and clutches. This new winch is driven by its own closed-loop hydrostatic system consisting of a variable displacement hydraulic piston pump and motor.

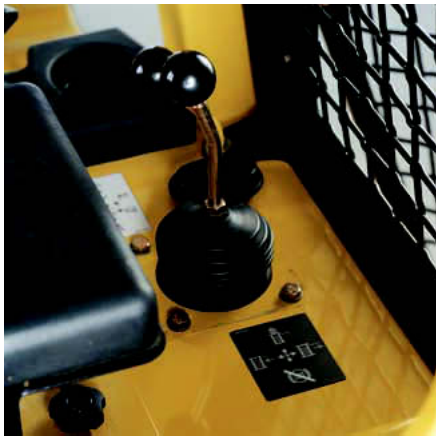

Infinitely Variable Speed Control. Similar to the hydrostatic system used to drive and control the tracks of the tractor, this winch offers outstanding control of the load with infinitely variable modulation of speed and pull. Other shaft-driven winches force the operator to choose the gear ratio of the winch. The G-Series hydrostatic winch eliminates this compromise by providing the speed of a standard speed winch and the pull of a low speed winch, all in one package.



Forestry Segment. A new, easier way to work in the woods. The new hydrostatic winch makes the job easier with:

- Excellent line pull at any speed
- Infinitely variable drum speed
- Lower operator effort
- Excellent load control





360 Degree Guarding. All around screen guarding is available. Canopy version includes screened, hinged doors with dampening device along with side and rear screens. The cab version offers Lexan glass doors for improved visibility while providing protection. Meets OSHA and WCB regulations.

Serviceability and Customer Support

Cat dealer services help you operate longer with lower costs.



Serviceability. Longer service intervals and easier maintenance result in better machine availability and lower owning and operating costs. The D5G features:

- Side by side radiator/transmission cooler
- Easier filter access
- Centrally located hydraulic pressure tap bank
- Extended oil and oil filter change intervals
- Extended oil dipstick
- Comprehensive on-board diagnostics



Right Side Access Doors. Access doors provide easy access to the diagnostic test bank, hydraulic oil filters and disconnect switch.



Left Side Access Doors. Left side access doors provide easy access to:

- Cab fresh air filter
- Heavy duty battery
- Fuel/water separator with filter
- Grease gun holder (not pictured)

Selection. Make detailed comparisons of the machines you are considering before you buy. What are the job requirements? What production is needed? What is the true cost of lost production? Your Cat dealer can give you precise answers to these questions.

Purchase. Look at the value G-series tractors offer. Consider all the flexible financing options your Cat dealer offers as well as day-to-day operating costs.

Operation. Improving operating techniques can boost your profits. Your Cat dealer has training literature and other ideas to help you increase productivity.

Maintenance. Repair options guarantee the cost of repairs up front. Diagnostic programs such as Scheduled Oil Sampling and Technical Analysis help you avoid unscheduled repairs.

Replacement. Repair, rebuild or replace? Your Cat dealer can help you evaluate the cost involved so you can make the right choice.

Product Support. You will find high availability of parts at our dealer parts counter. Cat dealers utilize a worldwide computer network to find in-stock parts to minimize machine downtime. Additionally, Caterpillar offers a line of genuine remanufactured components which can help lower repair costs.



Easy Financing. Your Cat dealer can provide a financing package to meet your needs.

Engine

Model	3046 T	
Power - Gross	74 kW	99 hp
Power - Net	67 kW	90 hp
Displacement	4996 cm^3	305 in^3
Caterpillar	67 kW	90 hp
ISO 9249	67 kW	90 hp
EEC 80/1269	67 kW	90 hp
SAE J1349	67 kW	90 hp
Bore	94 mm	3.7 in
Stroke	120 mm	4.7 in

- Ratings at 2400 RPM.
- Net power advertised is the power available at the flywheel when engine is equipped with fan, air cleaner, muffler and alternator.
- No derating required up to 2300 m (7500 ft) altitude.

Transmission

Drive Pumps	2	
Track motors	2	
Relief valve settings	44 000 kPa	6,380 psi
Maximum travel speed - forward	9 kph	5.6 mph
Maximum travel speed - reverse	9.6 kph	6 mph

- Dual-path, closed loop hydrostatic drive provides infinitely variable speeds from 0-9 kph (0-5.6 mph) forward and 0-9.6 kph (0-6 mph) reverse.
- Full-flow filtering of hydrostatic charge system oil.
- Drive pumps: two variable-displacement, slipper-axial piston pumps mounted tandem-style to engine flywheel housing.
- Track motors: two variable-displacement, link-type piston motors.

Weights

Operating Weight - XL	8904 kg	19,630 lb
Operating Weight - LGP	9254 kg	20,402 lb

- Operating with dozer blade, canopy ROPS, back-up alarm, operator, coolant, lubricants and full fuel tank.

Service Refill Capacities

Fuel tank	187 L	48.6 gal
Crankcase and filter	13 L	3.4 gal
Final drives, XL (each side)	14.7 L	3.9 gal
Final drives, LGP (each side)	21.5 L	5.7 gal
Cooling system	21 L	5.5 gal
Transmission/hydraulic tank	46.5 L	12 gal

Hydraulic Controls

Pump Output	66.7 L/min	17.6 gal/min
Relief valve setting	20 000 kPa	2,900 psi

- Pump output ratings at 2400 RPM and 6895 kPa (1000 psi)
- Control Positions:
  - Lift cylinders - raise, hold, lower, float
  - Tilt cylinders - left, hold, right
  - Angle cylinders - left, hold, right
  - Ripper cylinders - raise, hold, lower

Final Drive


Features

- Double-reduction, with outboard planetary gear set.
- Mounted independently of track frames to isolate them from machine weight and ground-induced shock loads.

Steering and Braking

Features

- Full powerturn
- Counterrotation
- Single lever steering, speed and direction control
- Hydrostatic (dynamic) braking through machine drive system using transmission control lever, center brake pedal or decel pedal.

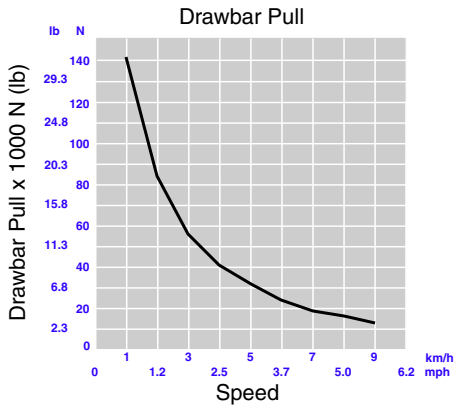

Undercarriage

Number of rollers (each side)	7	
Number of shoes (each side)	39	
Shoe width - XL	510 mm	20 in
Shoe width - LGP	660 mm	26 in
Length of track on ground - XL	2317 mm	91 in
Length of track on ground - LGP	2317 mm	91 in
Track gauge - XL	1549 mm	61 in
Track gauge - LGP	1727 mm	68 in
Ground contact area - XL	23 633 cm^2	3,663 in^2
Ground contact area - LGP	30 584 cm^2	4,741 in^2
Ground pressure - XL	37 kPa	5.36 psi
Ground pressure - LGP	29.7 kPa	4.3 psi

- Sealed and lubricated track (S.A.L.T.)
- Hydraulic track adjusters
- Box section track roller frames
- Bolt-on rear track guiding guards
- Full length recoil guarding with sprocket guards and wipers
- Serrated, two-piece split master link
- Single-grouser shoes
- Segmented sprocket
- Sealed and lubricated rollers and idlers

Ripper

Type	Parallelogram	
Number of Shanks	3	
Maximum digging depth	337.5 mm	13.3 in
Maximum reach at ground line	738.5 mm	29.1 in
Maximum ground clearance under tip	412.2 mm	16.2 in
Overall width	1710 mm	67.3 in
Height	165 mm	6.5 in
Weight	563 kg	1,241 lb

Winch

Weight	610 kg	1,345 lb
Winch Drive	Hydrostatic	
Control	Pilot hydraulic	
Speed	Variable	
Winch length	705 mm	27.76 in
Overall width	741 mm	29.2 in
Drum diameter	254 mm	10 in
Drum width	274 mm	10.8 in
Throat clearance	171.5 mm	6.75 in
Rope diameter - recommended	16 mm	0.63 in
Rope diameter - optional	19 mm	0.75 in
Drum capacity - recommended cable	113 m	371 ft
Drum capacity - optional cable	78 m	257 ft
Maximum line pull - bare drum	18 144 kg	40,000 lb
Maximum line pull - full drum	11 340 kg	25,000 lb
Maximum line speed - bare drum	43 m/min	140 ft/min
Maximum line speed - full drum	67 m/min	220 ft/min


- Infinitely variable line speed and line pull from 0 to maximum.
- Power in/power out, brake off, freespool (standard equipment).
- Single lever, low effort pilot hydraulic control.
- Precise load control and speed modulation.
- Integral mounted drawbar.
- 3 roller fairlead available. Kit available to add a 4th roller.

Standards

ROPS/FOPS	SAE J397-Oct95, SAE J1040-May94, ISO 3471-94, ISO 3164-95/ SAE J231-Jan81, ISO 3449-92

Dimensions

All dimensions are approximate.

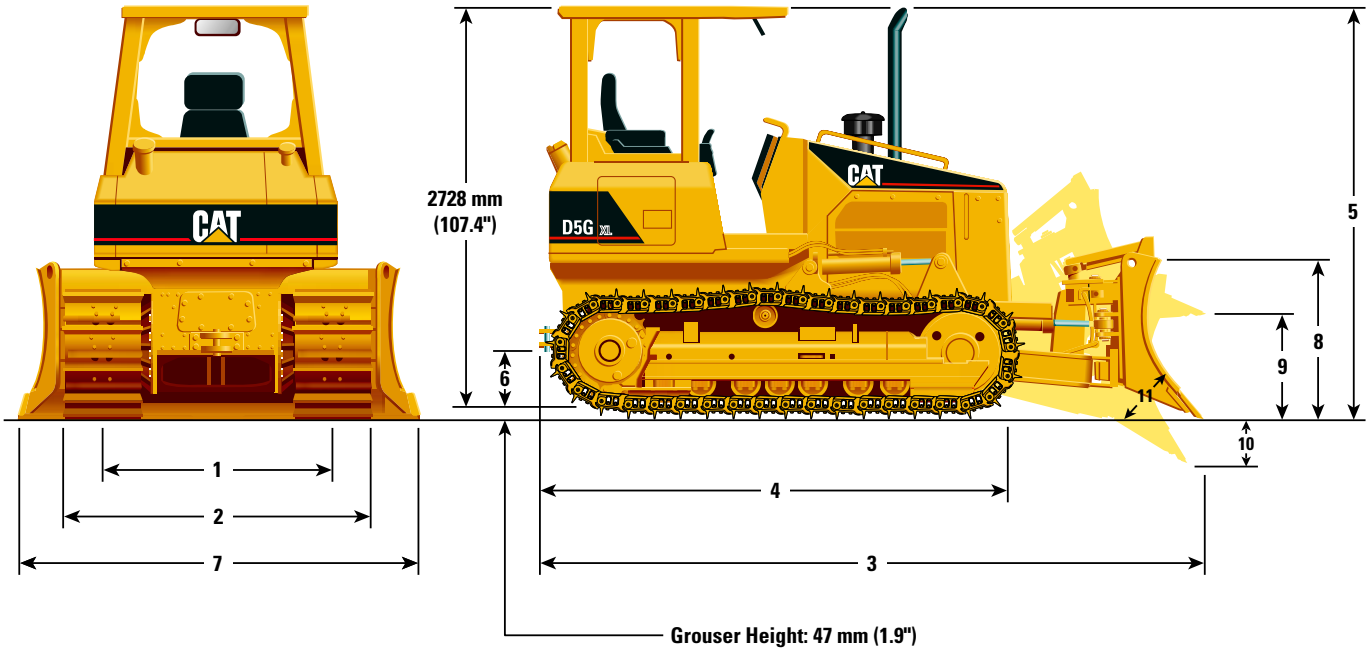

		XL	LGP
1	Track gauge	1549 mm (61")	1727 mm (68")
2	Width of tractor (std shoes, no blade)	2059 mm (81.1")	2387 mm (94.0")
3	Overall length (w/blade)	4336 mm (170.7")	4252 mm (167.4")
4	Length of basic tractor (w/o blade)	3184 mm (125.4")	3184 mm (125.4")
5	Tractor height	2775 mm (109.3")	2775 mm (109.3")
6	Ground clearance	384 mm (15.1")	384 mm (15.1")

	BLADE			
		XL	**Intermediate**	**LGP**
7	Blade width	2690 mm (105.9")	2921 mm (115")	3254 mm (128.1")
8	Blade height	1101 mm (43.3")	1028 mm (40.5")	1028 mm (40.5")
9	Blade lift height	760 mm (29.9")	789 mm (31.1")	789 mm (31.1")
10	Digging depth	630 mm (24.8")	582 mm (22.9")	582 mm (22.9")
11	Blade cutting edge angle, adjustable	50° to 55°	50° to 55°	50° to 55°
	Maximum tilt	390 mm (15.3")	423 mm (16.7")	471 mm (18.5")
	Maximum angle (either side)	25°	25°	25°
	Blade width at maximum angle	2456 mm (96.7")	2666 mm (105")	2970 mm (116.9")
	Blade capacity (SAE)	2.19 m^3 (2.86 yd^3)	2.09 m^3 (2.73 yd^3)	2.34 m^3 (3.06 yd^3)

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for specifics.

POWERTRAIN
- Air-to-oil transmission cooler and side by side radiator
- Air cleaner, radial dry-type with precleaner
- Blower fan
- CAT 3046 T 6-cylinder diesel engine with 12-volt direct electric key start/stop
- Fuel priming pump
- Fuel/water separator with integral filter
- Hydrostatic transmission, dual path, closed loop
- Muffler

ELECTRICAL
- Alternator, 55 amp
- Back-up alarm
- Battery, 12-volt, 900CCA
- Engine glow plugs
- Horn
- 12-volt powerport

UNDERCARRIAGE
- 7 roller track frame
- 61 inch gauge
- Sealed and lubricated tracks (39-section)
- 20 inch single grouser shoes
- Front/rear guiding guards
- Full length recoil guards with sprocket wiper plates
- Hydraulic track adjusters
- Segmented sprockets
- Split master link

HYDRAULICS
- 3 valve
- Hydraulic pump and oil
- Single lever-three function control

ANTIFREEZE
- Extended Life Coolant -37C (-34F)

OPERATOR ENVIRONMENT
- ROPS, Canopy
- Headliner
- Dash mounted lighted gauge package includes:
  - Fuel level
  - Coolant temperature
  - Engine oil pressure
  - Transmission oil temperature
  - Maximum speed setting gauge
- Indicator lights:
  - Low engine oil pressure
  - Parking brake
  - Hydraulics filter bypass
  - Low alternator charging
  - Electronic control fault
- Service hour meter
- Adjustable vinyl suspension seat
- Seat belt (3")
- Adjustable arm rests
- Joystick control lever:
  - Speed
  - Direction
  - Steering
  - Counterrotation
- Adjustable foot rests
- Decelerator
- 12-volt powerport

OTHER STANDARD EQUIPMENT
- C-Frame, VPAT, hydraulic cylinders and lines
- Heavy duty crankcase guard
- Engine enclosures
- Heavy-duty hood, radiator guard and grill
- Retrieval hitch (rear)
- Front pull device
- Vandalism protections
- Instructions, English
- Electronic technician connector
- Product Link - Installation ready

Optional Equipment (with approximate change in operating weight)

Standard and optional equipment may vary. Consult your Caterpillar dealer for specifics.

	kg	lb
Air cleaner, turbine	–0.45	–1
Batteries, heavy duty, 12-volt, maintenance free, two 900 cca	29	63
Blade, variable pitch, power angling & tilt		
XL, 2.19 m^3 (2.86 yd^3), 106" width	683	1506
Intermediate, 2.09 m^3 (2.73 yd^3), 115" width	627	1383
LGP, 2.34 m^3 (3.06 yd^3), 128" width	686	1513
1.43 m^3 (1.87 yd^3), 97" width	503	1110
Cab, ROPS, includes air conditioner, comfort seat (cloth), 110 amp alternator	403	889
Cab, ROPS, logging, includes screens and polycarbonate door windows, air conditioner, comfort seat (cloth), 110 amp alternator	606	1335
Drawbar, towing	13	29
Drive, auxiliary	11	23
Fan, reversible	5	10
Guards		
Rock, idler	31	69
Track roller	99	218
Heater, engine coolant	0.45	1
Heater, ROPS canopy	33	73
Hydraulic arrangement		
4-valve, 1-lever dozer control, for use with ripper	12	26
4-valve, 1-lever dozer control, for use with winch	12	26
Lights		
ROPS, canopy, two front, one rear	4	8
ROPS, cab, two front, one rear	7	16
Canopy (for use with sweeps)	7	15
Cab (for use with sweeps)	8	18

	kg	lb
Radiator grid, sandblast	12	27
Ripper, parallelogram, includes three shanks and teeth	563	1241
Screens		
Front and door, for use with ROPS canopy	91	200
Rear, for use with ROPS canopy	23	51
Rear, for use with ROPS cab	24	52
Side, for use with ROPS canopy	41	90
Side, for use with ROPS cab	46	102
Seat, comfort, suspension, vinyl	9	20
Sound suppression, exterior	16	35
Starting aid, ether	4	9
Sweeps, logging	133	293
Tracks		
18" single grouser, sealed and lubricated track	–84	–185
18" single grouser, Rotating Bushing Track	9	19
20" single grouser, Rotating Bushing Track	42	93
26" single grouser, Rotating Bushing Track	42	93
Winch		
Installation, includes pump, lines, filter and control lever	69	152
Winch, variable speed	610	1345
Fairlead (3-roller) for winch	120	265
4th roller kit for fairlead	17	38

Notes

D5G Track-Type Tractors

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at **www.CAT.com**

© 2001 Caterpillar
Printed in U.S.A.

Materials and specifications are subject to change without notice.
Featured machines in photos may include additional equipment.
See your Caterpillar dealer for available options.

AEHQ5461-01 (10-01)

CATERPILLAR®