
Drop-Deck Tilt

T-12DT

towmaster
a brand of aebi schmidt

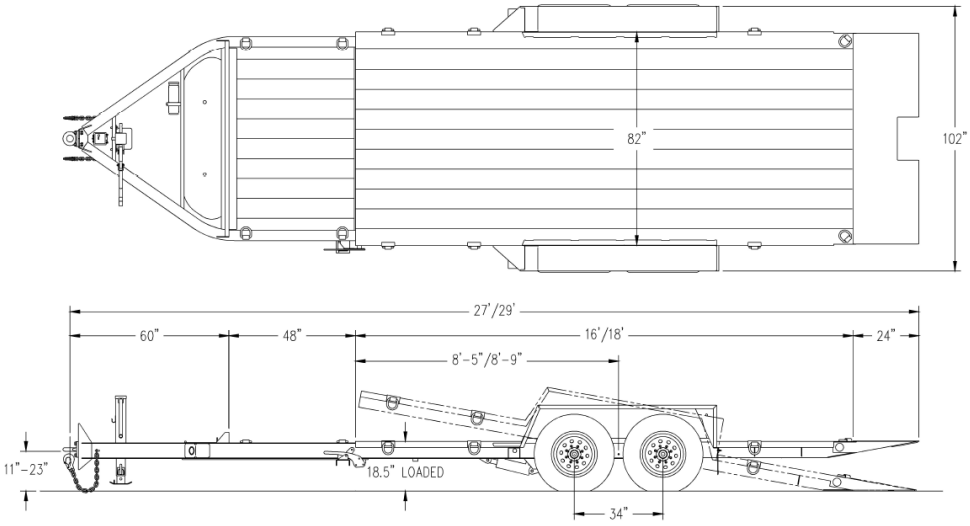

All dimensions are nominal. Illustration may be shown with optional equipment.

Standard Features

Hitch/Tongue

- Adjustable Height Hitch with Bolt-on Coupler
- 2.5" Pintle
- 7-Pole RV Plug
- One-Piece Cold-Formed I-Beam Frame Rails
- Integrated Storage Tray (Lockable Lid Optional)
- 12K Bolt-On, Side-Wind, Drop-Leg Parking Jack
- Battery Break-Away Kit with Tow Charger and Test Light
- Safety Chains with Hooks

Frame/Deck

- 82" Load Width
- 18.5" Deck Height (Fully Loaded)
- 4' Stationery Deck
- Tilt Deck Cushion Cylinder
- Dual-Point, Single Lever Deck Lock
- 6" I-Beam Main Frame
- 3" Channel Crossmembers
- 2" Nominal White Oak Deck
- D-Ring Tie-Downs (6 Per Side)
- 12 gauge One-Piece Formed Fender/Panel

Tail/Approach

- 24" Knife Edge Approach Plate (24" Length is in addition to 16' or 18' deck length)
- 16' Tilt Deck Load Angle 12°
- 18' Tilt Deck Load Angle 11°

Axles/Suspension

- Rubber Ride Torsion Suspension Axles
- (2) 7,000 lb. Axles (4 Wheels)
- Tires -235/85R16, Load Range F, 12-Ply
- 16' Wheels, 8-Bolt
- Electric Brakes
- Forward Self-Adjusting Brakes
- EZ Lube Hubs
- 34" Axle Spacing

Lights/Wiring

- Rubber Grommet Mounted LED Lights
- Sealed Modular Wiring Harness

Standard Features

- Limited Lifetime Frame Warranty-10 years
- One-Year Full Warranty
- 10 Year Suspension Warranty
- Weatherproof Registration Holder
- Two-Component Polyurethane Primer and Paint
- Trailer Color: Equipment Black

GAWR (lbs.)	GVWR (lbs.)	Weight (lbs.)	Capacity (lbs.)	Deck Width (in.)	Deck Length (ft.)
14,000	16,400	4,400	12,000	82"	16'
14,000	16,530	4,530	12,000	82"	18'

Other Options May Be Available. Ask Your Dealer or Visit our Website.

Listed GVWR, weight and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our website or your local authorized dealer for more information.

Options	T-12DT	T-16DT	T-20DT
TONGUE/HITCH			
Hydraulic Surge Brakes with Free Backing (Check Local D.O.T Laws)	●		
2-5/16” Ball Coupler	●		
2-5/16” Ball Coupler (25K Capacity)		●	●
3” Pintle Ring	●		
4-Way Flat Electrical Plug	●		
6-Pole Round Electrical	●	●	●
7-Pole Round Electrical	●	●	●
12k Electric Over Hydraulic Jack with Battery, Self-Contained	●	●	●
12k Spring Foot Jack	●	●	●
25k Two-Speed Jack		●	●
Lockable Storage Tray Lid (Storage Tray Standard)	●	●	●
Mesh in A-Frame of Tongue	●	●	●
A-Frame Gooseneck (2-5/16” coupler) 84” swing clearance, 39” hitch height/truck bed height (please call if your measurement is different). A toolbox, toolbox lid and dual 12k jacks are included.	●	●	●
Spare Tire Mount on A-Frame Gooseneck (Spare Tire Sold Separately)	●	●	●
A-Frame Gooseneck Toolbox (lockable) Mounted Between the Gooseneck Uprights, Includes a Chain Bar	●	●	●
MAIN DECK/BEAVERTAIL			
Pallet Fork Holders	●	●	●
4’ Stationary Deck with White Oak Decking (Adds Approximately 400 lbs. to GVWR)	●	●	●
5’ Stationary Deck with White Oak Decking (Adds Approximately 500 lbs. to GVWR)	●	●	●
6’ Stationary Deck with White Oak Decking (Adds Approximately 600 lbs. to GVWR)	●	●	●
8’ Stationary Deck with White Oak Decking—Max Capacity 2,000 lbs. (Adds Approximately 700 lbs. to GVWR)	●	●	●
Apitong Wood Decking Upgrade	●	●	●
7-Gauge Steel Deck in Lieu of Wood, with Non-Slip Grit	●	●	●
3/16” Diamond Plate Steel Decking, Crossmembers 12” on Center	●	●	●
Additional D-Ring Tie-Downs	●	●	●
Rub Rail and Stake Pockets in Lieu of D-Rings	●	●	●
Additional Stake Pockets	●	●	●
Tilt Deck Shut-Off Valve with Hydraulic Cylinders	●	●	●
Tilt Deck Power Up and Power Down, Includes Battery Kit	●	●	●

Options	T-12DT	T-16DT	T-20DT
SUSPENSION/TIRES AND WHEELS			
Hubodometer-Mounts on Wheel to Measure Distance Traveled	●	●	●
Spare Tire Mount Bracket, Mounted Inside Tongue	●	●	●
Spare Tire and Wheel 235/85R16 Load Range F	●		
235/85R16 Load Range “G” 14-Ply Upgrade (in lieu of “F”) set of Four Tires	●		
Spare Tire and Wheel 215/75R17.5 Load Range H			●
Spare Tire and Wheel 235/75R17.5 Load Range H		●	
RAMPS			
3’ Star Traction “SL” Ramps, The Scissor Lift “SL” Ramps Have a 7 Degree Load Angle, are Painted Red, are Mounted on Two Ramp Rods and are Adjustable, These Ramps Replace the Standard Tilt-Deck Knife Edge Approach, the Option Includes Auto-Latch Ramp Hold-Ups	●	●	●
EQUIPMENT RACK			
Rack Dimensions: Height (48”), Length (48”) Width (As Wide as Trailer Deck), Wood Topped	●	●	●
PAINT/ELECTRICAL/OTHER			
8K Electric Winch with 95 feet of 5/16” Cable, Mounted on the Deck Side of Headboard, Includes a Battery and Charger	●	●	●
8k Electric Winch with 95 Feet of 5/16” Cable, Pedestal Style (Stand Up) Mount with a Receiver Tube Mounted in the Tool Tray, Optional Tool Tray Lid is Split into Two Lids, Includes a Battery and Charger	●	●	●
Trailer Color Options: See Standard Color Chart	●	●	●
Galvanizing-(Please Call for Current Cost)	●	●	●
Custom Paint Color: Market Price (Please Call for Cost)	●	●	●
Two Chock Blocks with Holders (Mounted on Front of Fender)	●	●	●