GrainCart



Brandt

The Brandt 1020XR GrainCart has an innovative design with extra reach and better clearance to maximize your harvest potential.

1020XR GrainCart

Keep your combines rolling at maximum pace this harvest with the **1020XR GrainCart**. The innovative auger design and corner-placement provides extra reach and clearance, as well as great visibility while operating. Ruggedly constructed, with a large 1,000 bushel tank and high capacity 20 inch discharge auger, the **GrainCart** quickly and completely fills the trailer, saving you valuable time during harvest.



Extra Reach for Better Control


20" Auger with Extra Reach

Industry Leading Auger Reach

The 1020XR features a 20 inch auger with a hydraulically adjustable downspout and 24 more inches of lateral reach than competitive models. Corner auger positioning provides 100% visibility from the tractor seat.

Fast, Easy Cleanout

The high volume 1,000 bushel tank is powder coated to ensure smooth grain flow while unloading, and the unique inner tank structure design with no ledges or catch points makes for easy and total cleanout.

Durable Tubular Steel Mainframe

The tubular steel mainframe, 12 gauge steel shell and 3/16 inch tank supports provide added strength for carrying the heaviest loads in the field.

20 Inch Unloading Auger

The large 20 inch unloading auger provides a fast unloading rate of 500 bushels per minute, which gets you back in the field faster so the combine never has to stop. It also features a heavy duty unloading drive coupler and a 36 inch hydraulically operated grain flow gate to control unloading speed.

Hydraulically Adjustable Downspout

The heavy gauge plastic downspout is mounted on the end of the discharge auger, and rotates 105 degrees enabling the operator to accurately direct the flow of grain to the center line of the trailer, as well as fill the corners to top off loads.

Wheel Operated Cleanout Door

The wheel operated cleanout door has easy two handed operation that unlocks effortlessly for easy cleanout. The cleanout door locks with a leak free positive seal which ensures that nothing is leaked or spilled.

Worry Free & Safe

Need to know how much your grain weighs? The GrainCart 1020XR has two scales to suit your needs. The GT400 Scale for knowing the weight tank to tank, or the GT460 Scale with Autolog to keep track of the whole days work by a self-determined load or tank basis without leaving the tractor.

The available camera kit and transport lights ensure that, in any direction, you can see where you are going and others can see you.



Wheel Operated Cleanout Door

Transport Lights and Rear Camera

Available Attachments & Options

- Roll Tarp with 12 inch trussed hoops
- 55 GPM high flow Hydraulic Drive
- PTO drive with cut-out and overrunning clutch


GT 460 Scale Package


Camera Kit with Colour Monitor

Tire Options


High Flotation with 185 Load Index


Reduced Compaction Diamond Tread

The Brandt 1322XR GrainCart has the capacity and speed you need to keep your harvest moving efficiently.

1322XR GrainCart

The Brandt 1322XR GrainCart is for farmers who demand more. It partners a large 1300 bushel tank with a fast HP unloading auger to exceed your expectations. Using a 22" intake it can move 620 bu/min to get you back in the field sooner. The corner auger design gives you the reach and visibility you need while the versatile adjustable spout makes filling your trailers easy. With the extra reach Brandt is known for and the capacity that your farm operation needs, the 1322XR is built to do more.



Visibility & Versatility

The extra reach of the auger gives additional clearance for easy positioning alongside the trailer. The adjustable downspout hydraulically rotates to direct grain flow to the corners and fill the trailer evenly. Unloading speed can be precisely regulated with the hydraulically operated flow gate and easy-to-read indicator.

Corner Auger Unloading

The auger's corner positioning means 100% visibility from the tractor seat while unloading. The fully adjustable discharge spout is 34 inches closer to the tractor cab for increased visibility while unloading, allowing the driver to maintain forward visibility while directing the flow of grain. The auger folds compactly under the side of the cart for ease of transport and storage.

A Stable Advantage

The 1322XR comes standard with heavy duty 170 load range tires for stable transport, even with a full load. The adjustable walking beam axle system has 3 different width positions enabling the 1322XR to fit between crop rows, while also evenly distributing weight for a smooth ride over rough terrain. The new two tier folding auger rest allows the auger to quickly switch between infield working position and the narrow profile transport position for safe transport on the road.

Easy Cleanout

The 1322XR has a durable tank with no ledges or other catch points for simple and quick cleanout, saving valuable time when switching between crops. Support brackets inside the tank allow the grain to flow smoothly out of the cart, and the wheel operated clean out door offers easy access to the tank as well as a leak free seal.


Data Acquisition

The Brandt 1322XR GrainCart comes standard with a GT400 scale, or you can upgrade to a GT460. The GT400 Scale is a simple solution for measuring grain weight from tank to tank, while the GT460 Scale can keep track of the whole days work.







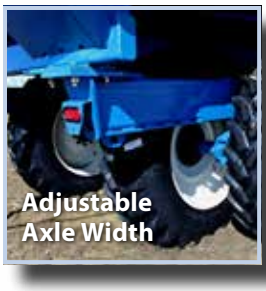






Features







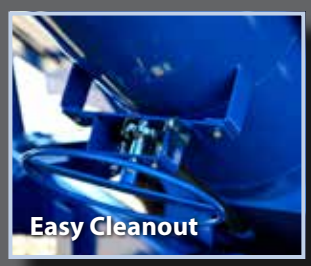


1020XR GrainCart

Performance	
Capacity* (bushels)	1,000
Unload Speed (bu/min)	500
Minimum Tractor Horsepower	200
General	
Auger Size	20"
Flighting	1/2" Extended Life
Adjustable Discharge Travel	105°
Axle Spindle Diameter	4.5"
Hitch Type	Austempered Ductile Iron
Tire Size	900/60R32
Tire Load Index	185
Weight	
Empty	13,200 lb
Tongue - Full (Standard Front Axle Position)	4,700 lb
Tongue - Full (Rear Axle Position)	6,600 lb
Dimensions	
A - Hitch Height	1' - 2'3"
B - Axle to Tongue Length	16' 8"
C - Overall Length	31'
D - Hopper Length	21' 2"
E - Auger Extends Forward	4' 9"
F - Auger Unloading Height	18' 2"
G - Discharge Height	13' 8"
H - Auger Reach	11' 1"
J - Overall Width	11' 10"
K - Minimum Hopper Height	10' 6"
L - Loading Side Height	11' 6
M - Transport Height	13'
N - Ground Clearance	1' 7"
P - Wheel Inside Width	8' 4"
R - Track Width	11' 3"
S - Wheel Outside Width	14' 4"

*Bushel capacities measured with 56 lb. corn at 15% moisture

Note: All dimensions calculated with 900/60R32 tires installedwith factory instructions as contained in the operator's manual, for the following term: 1 year Parts and Labour. Please refer to the owner's manual for complete warranty information.

Product specifiations and configuration are subject to change without prior notice. Before ordering, please ask your Brandt dealer for the latest information. The manufacturer reserves the right to make changes at any time, without notice, to prices, specification and models.

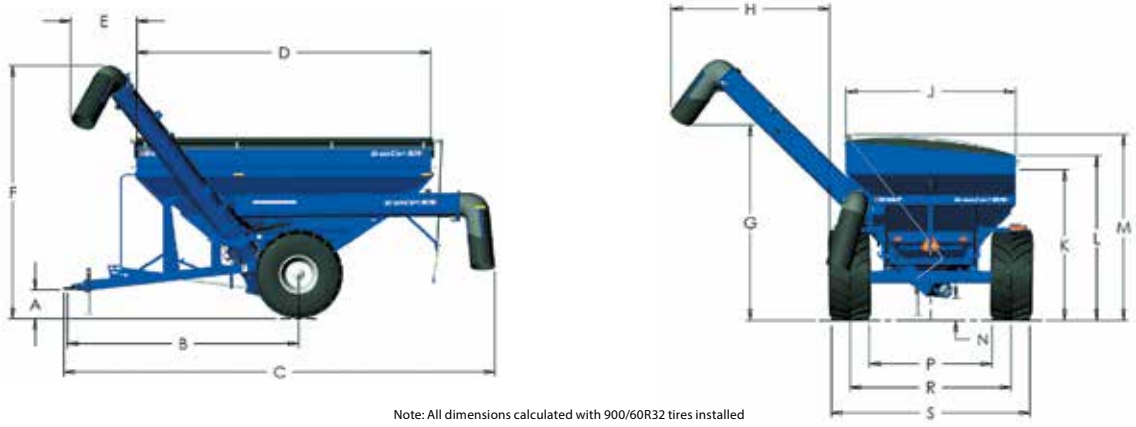

Note: All dimensions calculated with 900/60R32 tires installed


1322XR GrainCart


Performance	
Capacity* (bushels)	1,300
Unload Speed (bu/min)	620
Minimum Tractor Horsepower	250
General	
Auger Size	20" with 22" Booster
Flighting	1/2" Extended Life
Adjustable Discharge Travel	105°
Axle Spindle Diameter	3.75"
Hitch Type	Austempered Ductile Iron
Tire Size (Tandem Duals)	520/85R42
Tire Load Index	170
Weight	
Empty	21,000 lb
Tongue - Empty	4,100 lb
Tongue - Full	6,500 lb
Minimum Tractor Weight	48,000 lb
Dimensions	
B - Axle to Tongue Length	20'
C - Overall Length	33'
D - Hopper Length	24'
E - Auger Extends Forward	13' 6"
G - Discharge Height	13' 9"
H - Auger Reach	9'
J - Overall Width	14'
L - Loading Side Height	11' 5"
M - Transport Height	12' 6"
N - Ground Clearance	1' 6"
P - Inner Duals Track Width (adjustable)	6' 9" - 7' 6" - 8' 4"
R - Outer Duals Track Width (adjustable)	10' - 10' 10" - 11' 6"
S - Outer Duals Outside Width (adjustable)	11' 10" - 12' 7" - 13' 4"

*Bushel capacities measured with 56 lb. corn at 15% moisture

© Brandt Industries Ltd. All rights reserved. Brandt and Brandt logo are trademarks of Brandt Industries Ltd, used under license.
Printed in Canada. 2012

Product specifiations and configuration are subject to change without prior notice. Before ordering, please ask your Brandt dealer for the latest information. The manufacturer reserves the right to make changes at any time, without notice, to prices, specification and models

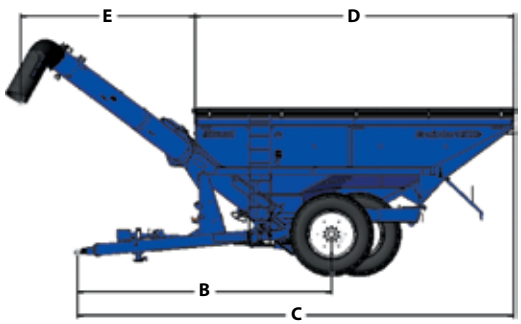

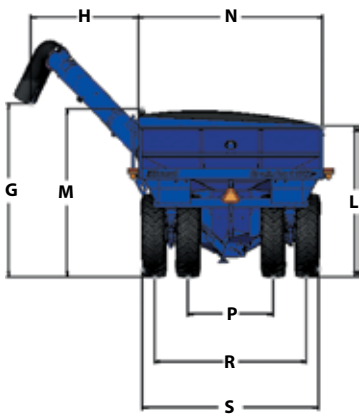



Contact us for more information or to arrange a demonstration of our products:

Brandt Agricultural Products Ltd
P.O. Box 317, 13th Ave and Pinkie Rd.
Regina, Saskatchewan, Canada S4P 3A1
1-866-4BRANDT Toll Free in US & Canada
1-306-525-1314
agriculture@brandt.ca

Visit www.brandt.ca for a list of local Brandt Equipment Dealers.

www.brandt.ca

Brandt