KOMATSU®

PC360LC-10

Tier 4 Interim Engine

RIDGWAY Rentals

PLANT RENTAL • HAULAGE • SALES • PARTS • SERVICE

PC360LC

NET HORSEPOWER	OPERATING WEIGHT	BUCKET CAPACITY
257 HP @ 1950rpm	**78,255–79,930 lb**	**0.89–2.56 yd³**
192 kW @ 1950rpm	35496–36255 kg	0.68–1.96 m³



PHOTOS MAY INCLUDE OPTIONAL EQUIPMENT

WALK-AROUND

PC360LC-10



Photos may include optional equipment

NET HORSEPOWER	OPERATING WEIGHT	BUCKET CAPACITY
257 HP @ 1950rpm	**78,255–79,930 lb**	**0.89–2.56 yd³**
192 kW @ 1950rpm	35496–36255 kg	0.68–1.96 m³

KOMATSU CARE™

FAST CYCLE TIMES & LOW FUEL CONSUMPTION

Komatsu's Closed Center Load Sensing (CLSS) hydraulic system provides quick response and smooth operation to maximize productivity.

New engine and hydraulic pump control technology improves operational efficiency and lowers fuel consumption.



A powerful Komatsu SAA6D114E-5 engine provides a net output of 192 kW **257 HP**. This engine is EPA Tier 4 Interim and EU stage 3B emissions certified.

Komatsu Variable Geometry Turbocharger (KVGT) uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

Komatsu Diesel Particulate Filter (KDPF) captures 90% of particulate matter and provides automatic regeneration that does not interfere with daily operation.



Two boom mode settings provide power mode for maximum digging force or smooth mode for fine grading operations.

Increased drawbar pull provides improved steering and manueverability.

Large LCD color monitor panel:

- 7" high resolution screen
- Provides "Eco-Guidance" for fuel efficient operation
- Enhanced attachment control

Rearview monitoring system (standard)

Enhanced working modes are designed to match engine speed, pump delivery, and system pressure to the application.

Enhanced working environment

- High back, heated, and air suspension operator seat
- Integrated ROPS cab design (ISO 12117-2)
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard (ISO 10262)

Equipment Management Monitoring System (EMMS) continuously monitors machine operation and vital systems to identify machine issues and assist with troubleshooting.

Heavy duty boom design with large one piece castings provides increased strength and reliability.

Guardrails (standard) located on the machine upper structure provide a convenient work area in front of the engine.


Battery disconnect switch allows a technician to disconnect the power supply before servicing the machine.

Komatsu designed and manufactured components

KOMTRAX®


Komtrax equipped machines can send location, SMR and operation maps to a secure website utilizing wireless technology. Machines also relay error codes, cautions, maintenance items, fuel levels, and much more.

PERFORMANCE FEATURES

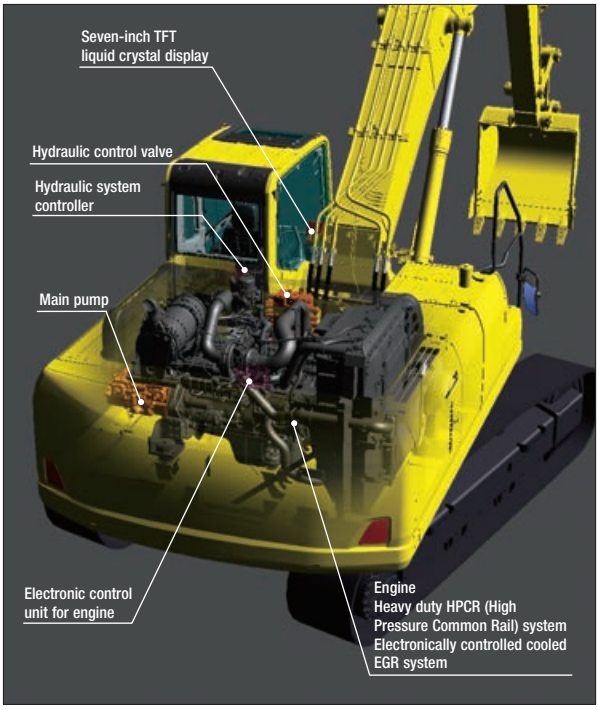

Advanced Electronic Control System

The engine control system has been upgraded to effectively manage the air flow rate, EGR gas flow rate, fuel injection parameters, and aftertreatment functions. The new control system also provides enhanced diagnostic capabilities.

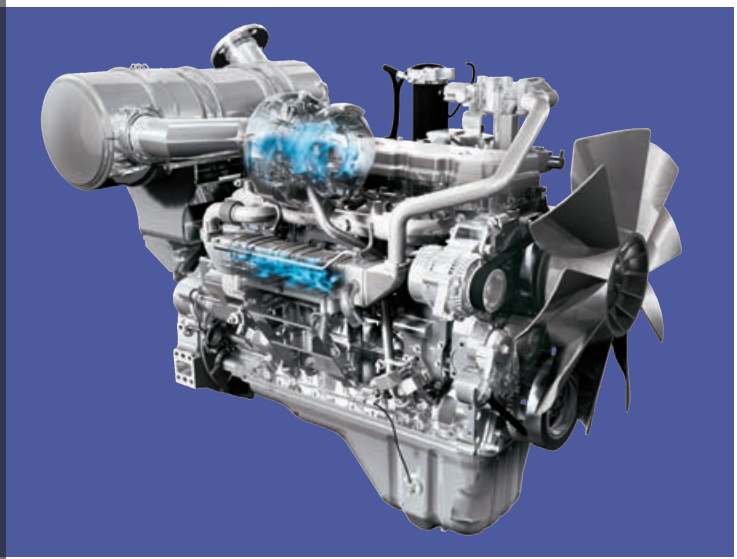

Environment-Friendly Engine

The Komatsu SAA6D114E-5 engine is EPA Tier 4 Interim and EU Stage 3B emissions certified and provides exceptional performance while reducing fuel consumption. Based on Komatsu proprietary technologies developed over many years, this new diesel engine reduces exhaust gas particulate matter (PM) by more than 90% and nitrogen oxides (NOx) by more than 45% when compared to Tier 3 levels.

Through the in-house development and production of engines, electronics, and hydraulic components, Komatsu has achieved great advancements in technology, providing high levels of performance and efficiency in virtually all applications.


Low Operational Noise

The PC360LC-10 provides low noise operation using a low noise engine and methods that reduce noise at the source such as sound absorbing materials.

Komatsu Diesel Particulate Filter (KDPF)


Komatsu has developed a high efficiency diesel particulate filter that captures more than 90% of particulate matter. Both passive and active regeneration are automatically initiated by the engine controller depending on the soot level of the KDPF. A special oxidation catalyst with a fuel injection system is used to oxidize and remove particulate matter while the machine is running so the regeneration process will not interfere with daily operation.

The operator can also initiate regeneration manually or disable regeneration depending on the work environment.

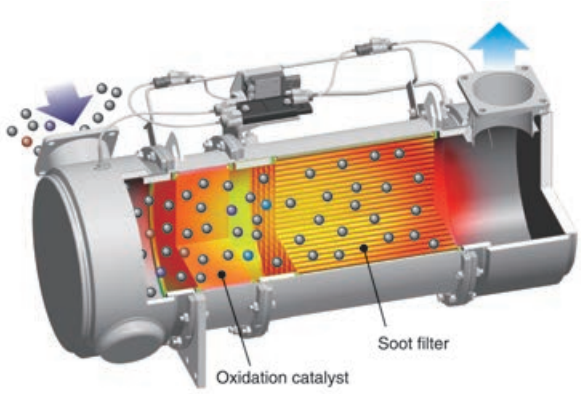

Komatsu Variable Geometry Turbocharger (KVGT)

Using Komatsu proprietary technology, a newly designed variable geometry turbocharger with a hydraulic actuator is used to manage and deliver optimum air flow to the combustion chamber under all speed and load conditions. The robust hydraulic actuator provides power and precision, resulting in cleaner exhaust gas and improved fuel economy while maintaining performance.

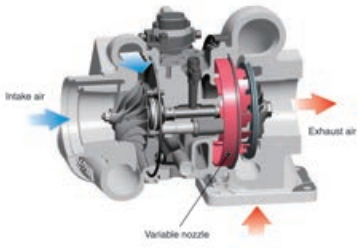


Closed Crankcase Ventilation (CCV)

Crankcase emissions (blow-by gas) are passed through a CCV filter. The CCV filter traps oil mist which is returned back to the crankcase while the gas, which is almost oil mist free, is fed back to the air intake.



Redesigned Combustion Chamber

The combustion chamber located at the top of the engine piston has a new shape designed to improve combustion and further reduce NOx, PM, fuel consumption, and noise levels.

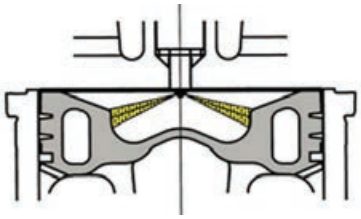

Large Digging Force

The PC360LC-10 is equipped with the Power Max system. This function temporarily increases digging force for 8.5 seconds of operation.

Maximum arm crowd force (ISO):

160 kN (16.3 t) ➡ **171 kN (17.4 t)** **7 % UP**

(with Power Max.)

Maximum bucket digging force (ISO):


213 kN (21.7 t) ➡ **228 kN (23.2 t)** **7 % UP**

(with Power Max.)

* Measured with Power Max function, 3185 mm arm and ISO rating


Cooled Exhaust Gas Recirculation (EGR)

Cooled EGR, a technology that has been well proven in Komatsu Tier 3 engines, reduces NOx emissions to meet Tier 4 levels. The hydraulically actuated EGR system has increased capacity and uses larger and more robust components to ensure reliability for demanding work conditions.

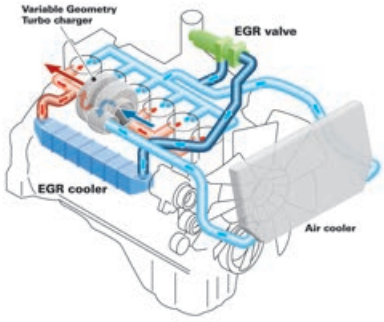

Heavy Duty High Pressure Common Rail (HPCR) Fuel Injection System

The heavy duty HPCR system is electronically controlled to deliver a precise quantity of pressurized fuel into the combustion chamber using multiple injection events to achieve complete fuel burn and reduce exhaust gas emissions. Fuel injector reliability has been improved by using ultra-hard wear resistant materials.





PERFORMANCE FEATURES

Efficient Hydraulic System

The PC360LC-10 uses a Closed Center Load Sensing (CLSS) hydraulic system that improves fuel efficiency and provides quick response to the operator's demands.


The PC360LC-10 also introduces new technology to enhance the engine and hydraulic pump control. This total control system matches the engine and hydraulics at the most efficient point under any load condition. There have also been improvements in the main valve and hydraulic circuit to reduce hydraulic loss, resulting in higher efficiency and lower fuel consumption.

Reduced Up To 10% Fuel consumption


vs PC350LC-8
Based on typical work pattern collected via KOMTRAX

Two Boom Mode Settings

Smooth boom mode provides easy operation for gathering blasted rock or when scraping down. Power boom mode maximizes digging force for more effective excavating.




Boom floats upward, reducing lifting of the machine. This improves comfort while gathering blasted rock and scraping down.



Boom pushing force is increased, ditch digging and box digging operation on hard ground are improved.

Smooth Loading Operation


Two return hoses improve hydraulic performance. During the arm out function, a portion of the oil is returned directly back to the tank for smooth operation.



Working Mode Selection


The PC360LC-10 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC360LC-10 features a new mode (ATT/E) which allows operators to run attachments while in Economy mode.

Working Mode	Application	Advantage
P	Power mode	•Maximum production/power •Fast cycle times
E	Economy mode	•Good cycle times •Better fuel economy
L	Lifting mode	•Increases hydraulic pressure
B	Breaker mode	•Optimum engine rpm, hydraulic flow
ATT/P	Attachment Power mode	•Optimum engine rpm, hydraulic flow, 2-way •Power mode
ATT/E	Attachment Economy mode	•Optimum engine rpm, hydraulic flow, 2-way •Economy mode

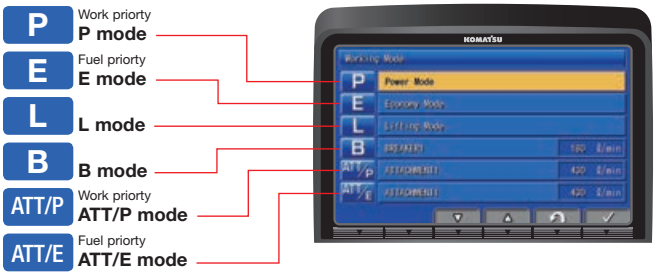

Eco-Gauge Assists with Energy Saving Operations


The Eco-gauge and new fuel consumption gauge are viewed on the right side of the color monitor and assist the operator in maintaining low fuel consumption and environment friendly operation.

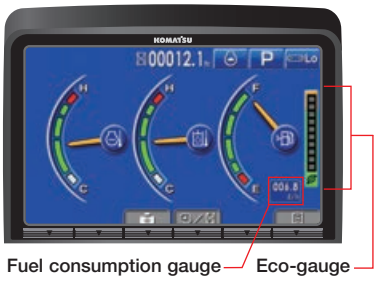

RELIABILITY FEATURES

High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross-sectional areas and large one piece castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. An HD boom assembly is offered for increased strength and reliability.

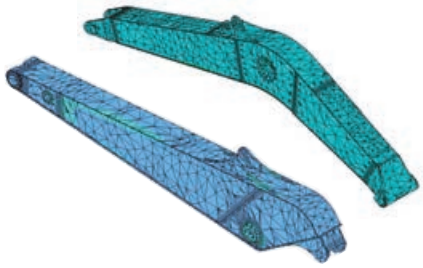

Komatsu Designed Components


All of the major machine components such as the engine, hydraulic pumps, hydraulic motors, and control valves are exclusively designed and manufactured by Komatsu.

High Efficiency Fuel Filter

A new high efficiency dual element fuel filter improves fuel system reliability.

Equipped with a Fuel Pre-filter (With Water Separator)

A fuel pre-filter removes water and contaminants in the fuel to increase reliability. For convenience, the fuel pre-filter has a built in priming pump.



Durable Frame Structure

The revolving frame, center frame, and undercarriage are designed using the most advanced three dimensional CAD and FEM analysis technology.


Highly Reliable Electronic Devices

Exclusively designed electronic devices have passed severe testing.

- Controllers
- Connectors
- Sensors
- Heat Resistant Wiring


Grease Sealed Track

The PC360LC-10 uses grease sealed tracks for extended undercarriage life.

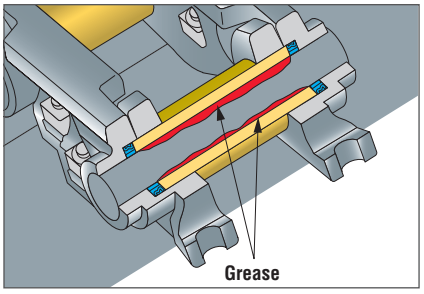


Metal Guard Rings

The PC360LC-10 uses metal guard rings to protect all of the hydraulic cylinders and improve long term reliability.

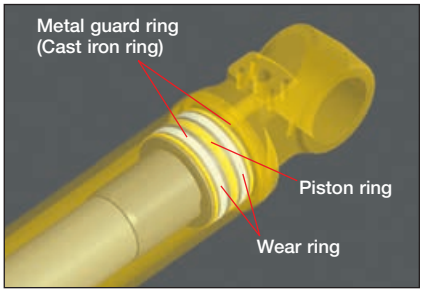

O-Ring Face Seals

Flat face-to-face O-ring seals are used to securely seal hydraulic hose connections.

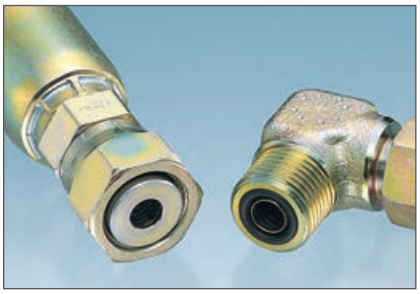




WORKING ENVIRONMENT



Automatic Air Conditioner

The automatic air conditioner allows the operator to easily and precisely set the cab atmosphere using the large LCD color monitor panel. The bi-level control function improves air flow and keeps the inside of the cab comfortable throughout the year.



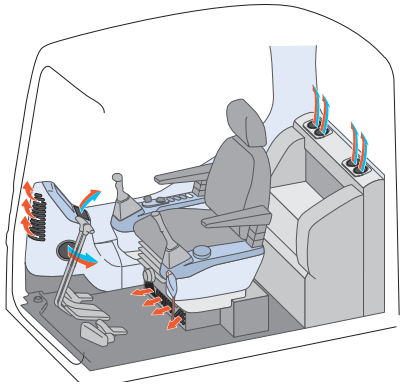

Newly Designed Wide Spacious Cab

The newly designed wide spacious cab features a high back, fully adjustable seat with a reclining backrest. The console and seat have an integrated design so that they move together and provide additional comfort for the operator.

The new higher capacity operator seat has been enhanced to provide more comfort.

- Heated
- Air Suspension
- Integrated Seat
- Console Mounted Arm Rests




Pressurized Cab

The air conditioner, air filter, and a higher internal cab air pressure minimize the amount of external dust that enters the cab.

Low Vibration with Viscous Cab Mounts

The PC360LC-10 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

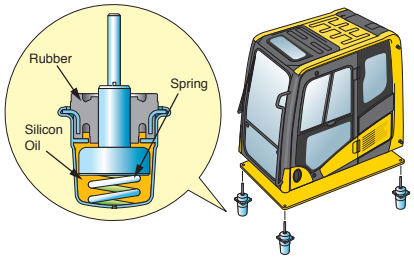


Low Cab Noise

The new cab design is highly rigid and has excellent sound absorption ability. By improving noise source reduction and by using a low noise engine, hydraulic equipment, and air conditioner, this machine is able to generate low noise levels similar to that of a modern automobile.

Auxiliary Input (MP3 Jack)

By connecting an auxiliary device such as an MP3 player to the auxiliary input, the operator can hear the sound through the speakers installed in the cab.



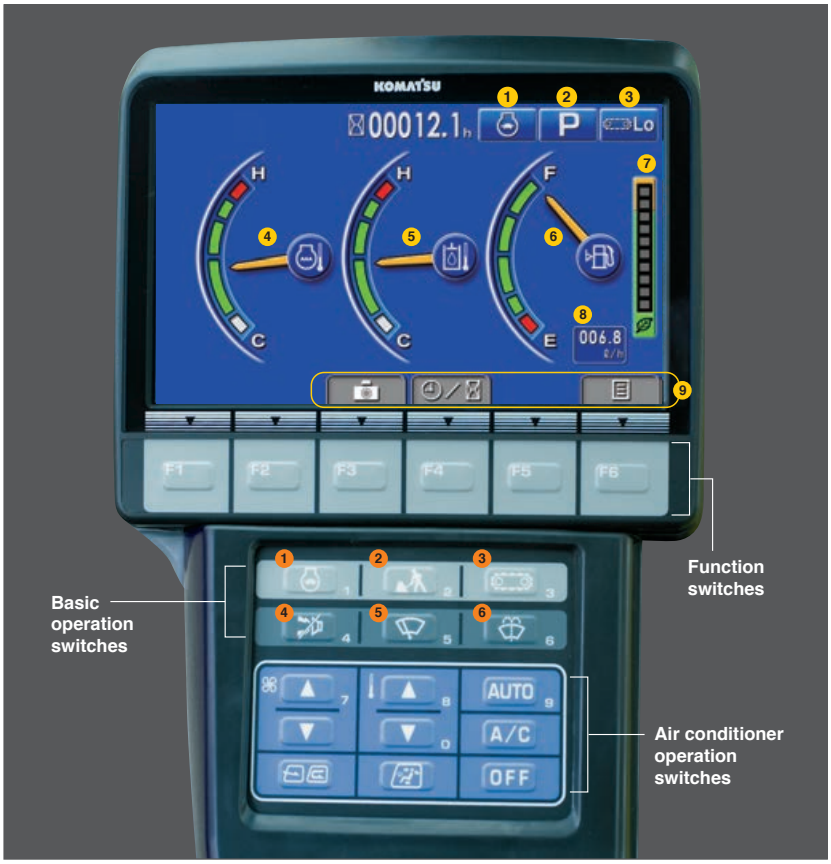

Large High Resolution LCD Monitor Panel

A new large, user-friendly, high resolution LCD color monitor enables accurate and smooth work. Screen visibility and resolution are further improved compared to the previous LCD monitor panel. The switches and function keys are easy to operate and provide simple navigation through the monitor screens.

Data is displayed in 25 languages to support operators around the world.

Indicators

1. Auto-decelerator
2. Working mode
3. Travel speed
4. Engine water temperature gauge
5. Hydraulic oil temperature gauge
6. Fuel gauge
7. Eco-gauge
8. Fuel consumption gauge
9. Function switches menu

Basic operation switches

1. Auto-decelerator
2. Working mode selector
3. Traveling selector
4. Buzzer cancel
5. Wiper
6. Windshield washer

Operational "ECO" Guidance


The monitor panel provides operational advice to the operator to help improve machine efficiency and lower fuel consumption. The operator can access the ECO guidance menu to check the Operation Records, Eco Guidance Records, and Average Fuel Consumption Logs.



ECO Guidance



ECO Guidance menu

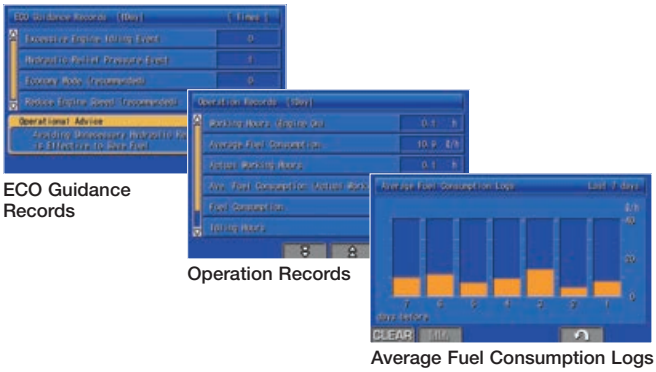

ECO Guidance Records

Operation Records

Average Fuel Consumption Logs

Improved Attachment Control

The PC360LC-10 is capable of storing up to ten different attachments in the new monitor panel. The name of each attachment can be changed for better tool management. Hydraulic flow rates can be easily adjusted for one-way and two-way flow attachments.



Attachment Setting Screen



Attachment Flow Screen

MAINTENANCE FEATURES

KDPF Regeneration Notification

The LCD color monitor panel provides the operator with the status of the KDPF regeneration, without interfering with daily operation.

When the machine initiates active regeneration an icon will appear to notify the operator.



Easier Engine Access

Engine maintenance is made easier with a new platform.



Sloped Track Frame

Minimizes dirt and sand accumulation while allowing easy mud removal.

Battery Disconnect Switch

A standard battery disconnect switch allows a technician to disconnect the power supply and lock out before servicing the machine.



Manual Stationary Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel.

A soot level indicator is displayed to show how much soot is trapped in the KDPF.



Soot level indicator

Long Life Oils, Filters

High performance filters are used in the hydraulic circuit and engine. By increasing the oil and filter replacement intervals, maintenance costs can be significantly reduced.



Hydraulic oil filter
(Eco-white element)

Engine oil & Engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours

Extended Work Equipment Greasing Intervals

Special hard material is used for the work equipment bushings to lengthen the greasing intervals. All work equipment bushing lubrication intervals, except the arm tip and bucket linkage, are 500 hours, reducing maintenance costs.

Equipped with Eco-drain Valve

Minimizes ground contamination due to oil leakage when replacing the engine oil.



Photos may include optional equipment

Gas Assisted Engine Hood Damper Cylinders

The engine hood can be easily opened and closed by using the gas assisted engine hood damper cylinders.

Equipment Management Monitoring System (EMMS)

The PC360LC-10 features an advanced diagnostic system that continuously monitors the machine's vital systems. EMMS tracks maintenance items, provides advanced troubleshooting tools, reduces diagnostic times, and displays error codes.

Through continuous monitoring, the EMMS helps identify issues before they become worse and allows the operator to concentrate on the work at hand.

Abnormalities Display with Code

When an abnormality occurs an error code is displayed on the monitor. When an important code is displayed, a caution lamp blinks and warning buzzer sounds to alert the operator to take action.


The monitor also stores a record of abnormalities for more effective troubleshooting.





Advanced Monitoring System

The monitor provides advanced monitoring diagnostics to assist with troubleshooting and reduce costly downtime.

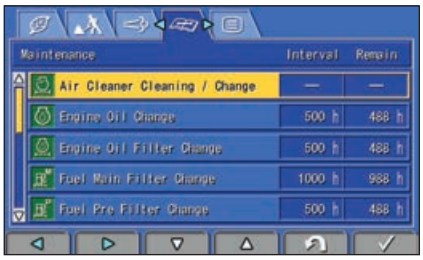

Maintenance Tracking

When the machine approaches or exceeds the oil and filter replacement interval, the monitor panel will display lights to inform the operator.

GENERAL FEATURES

ROPS Cab Design

The PC360LC-10 is equipped with an integrated ROPS cab as standard equipment. The cab also meets OPG Top Guard Level 1 requirements.



Guardrails

Guardrails have been added on the upper structure of the machine. This provides additional convenience during engine service.



Thermal and Fan Guards

Thermal and fan guards are placed around high temperature parts of the engine and fan drive.



Increased Drawbar Pull

Increased drawbar pull provides improved steering and manueverability.



Rear-view Monitoring System (standard)

On the large LCD color monitor the operator can view the image from one camera that will display areas directly behind the machine. An optional 2-camera system is available.





Rear view image on monitor

Seat Belt Caution Indicator

A warning indicator on the monitor appears when the seat belt is not engaged.



Lock Lever

When the lock lever is placed in the lock position, all hydraulic controls (travel, swing, boom, arm, and bucket) are inoperable.



Secondary Engine Shutdown Switch

A new secondary switch has been added to shutdown the engine.



Slip Resistant Plates

Durable slip resistant plates maintain excellent foot traction



KOMTRAX EQUIPMENT WORKING ENVIRONMENT MONITORING



KOMTRAX is Komatsu's remote equipment monitoring and management system. KOMTRAX gathers critical machine and operation information and provides it in a user-friendly format so that you can make well-informed decisions. KOMTRAX gives you more control of your equipment and better control of your business!

KOMTRAX comes standard on all new Komatsu machines with complimentary manufacturer communications services throughout the entire ownership period. It is a powerful tool and makes Komatsu machines an even better purchase!

Fleet Optimization

KOMTRAX tells you how your machines and operators are performing. KOMTRAX provides:

- Fuel consumption data and trends, by unit or fleet
- Machine fuel level
- Machine utilization
- Actual working hours/Machine idle hours
- Attachment usage hours
- Machine travel hours
- Machine load analysis
- Operating mode ratios

Location and Asset Management

KOMTRAX tells you where your machines are and can help prevent unauthorized use. KOMTRAX provides:

- GPS location/Operation maps
- Out-of-area and movement alert with location and time
- Engine, nighttime, and calendar lock

Maintenance Management

KOMTRAX monitors the health of your machines and provides critical information so that you, and your distributor, can take proactive maintenance measures and reduce downtime. KOMTRAX provides:

- Service Meter Reading (SMR)
- Cautions/Abnormality codes
- Maintenance replacement notifications

Easy and Flexible Access to Information

With KOMTRAX, information about your machines is through a convenient, internet-based portal. KOMTRAX provides:

- A user-friendly KOMTRAX website that provides customized access to your machine information
- E-mail and text alerts
- Web dial-up service
- Monthly fleet summary reports

For more information, including terms and conditions of the manufacturer complimentary KOMTRAX communication service, ask your distributor, pick up a KOMTRAX brochure, or go to www.komatsuamerica.com/komtrax.

KOMTRAX®

For construction and compact equipment.

KOMTRAX Plus

For production and mining class machines.

KOMATSU PARTS & SERVICE SUPPORT

Komatsu is an industry leader in building reliable and technologically advanced machines. It is only fitting that we would provide superior Product Support. Komatsu and its distributors are focused on providing their customers unparalleled Product Support throughout the entire lifecycle of the machine. It's called Komatsu CARE.

Komatsu CARE – Complimentary Scheduled Maintenance

Komatsu remains focused on lowering the customer's ownership costs by engineering machines with increased fuel efficiency and productivity. In addition, one Komatsu CARE program aimed at further reducing your owning and operating costs is Complimentary Scheduled Maintenance. Komatsu machine owners can now rely on their Komatsu Distributor to perform the preventative maintenance on their Komatsu Tier 4 machines.

- Complimentary scheduled maintenance for the earlier of 3 years or 2,000 hours is standard on all Komatsu Tier 4 construction machines and is available at all distributors in the U.S. and Canada.
- Service is performed by factory certified technicians using only Komatsu Genuine parts and fluids
- Significantly lowers your cost of ownership while maintaining high equipment uptime and reliability
- Increases resale value and provides detailed maintenance records


Komatsu CARE – Extended Coverage

Komatsu equipment is built to withstand harsh operating environments, but our Extended Coverage can provide further peace of mind by protecting customers from unplanned expenses and impacts in cash flow. Purchasing Komatsu CARE's Extended Coverage locks-in the cost of covered parts and labor for the extended warranty period and helps to turn these variable expenses into a fixed cost.

- No Stop Loss or Loss Limits imposed, regardless of the coverage type or repair expense
- Any combination of months and hours out to five years and 10,000 engine hours – KOWA kits included
- Coverage premium can be rolled into the machine financing at time of sale or purchased any time before the expiration of the machine's standard warranty
- Coverage is fully transferable and honored by all Komatsu distributors throughout the U.S. and Canada

Komatsu CARE – Total CARE

Total CARE combines the benefits of the Komatsu CARE Scheduled Maintenance and Extended Coverage programs on your Tier 4 machine. This ensures the use of Komatsu genuine parts and fluids during regular maintenance intervals as well as highly skilled and efficient technicians to perform any other warranty repair work that might be necessary to keep your Komatsu equipment running like new.

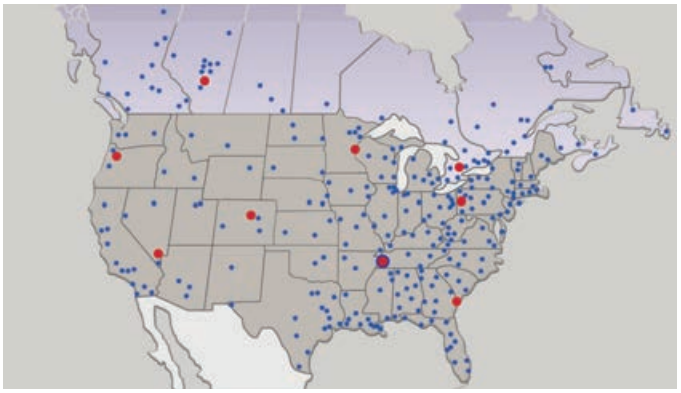

Komatsu Parts Support

Because downtime can be costly, Komatsu maintains a a strategic distribution network throughout the U.S. and Canada, to ensure superior parts availability and to keep your Komatsu machine up and running.

- Komatsu America has nine Parts Distribution Centers strategically located throughout the U.S. and Canada
- Komatsu America's Parts distribution network is accessible 24/7/365 to fulfill your parts needs
- Komatsu has a distributor network of over 325 locations across the U.S. and Canada
- Online parts ordering available through Komatsu eParts, 24/7/365. (See distributor for details)
- Komatsu offers a a full line of factory Remanufactured products with same-as-new warranties at a significant cost reduction:
    1. Complete Engine Assemblies
    2. Transmissions
    3. Torque Converters
    4. Hydraulic components
    5. Starters, Alternators, turbochargers and circuit boards

Komatsu Oil and Wear Analysis (KOWA)

The KOWA program uses independent laboratories across the United States to determine how your machine is performing based on a small sample of oil or other fluid. Just like a doctor will take a blood test to check on your personal health, KOWA allows you to check how your equipment is performing. Used with PM Clinic and PM Tune Up, KOWA is one of your best tools for proactively maintaining your Komatsu equipment and maximizing it's availability and performance.

KOWA detects fuel dilution and coolant leaks, identifies contaminants, and measures wear-metals. Your distributor will help you interpret this information so you can identify potential problems and head them off before they lead to major repairs.

For more information of all of the manufacturer sponsored programs mentioned in this brochure, including terms and conditions of the individual programs, please speak with your distributor or go to www.komatsuamerica.com

SPECIFICATIONS

ENGINE

Model ..... Komatsu SAA6D114E-5*
Type ..... Water-cooled, 4-cycle, direct injection
Aspiration ..... Turbocharged, aftercooled, cooled EGR
Number of cylinders 6
Bore ..... 114 mm **4.49"**
Stroke ..... 144.5 mm **5.69"**
Piston displacement ..... 8.85 ltr **540 in³**
Horsepower:
SAE J1995 ..... Gross 202 kW **271 HP**
ISO 9249 / SAE J1349 ..... Net 192 kW **257 HP**
Rated rpm 1950
Fan drive method for radiator cooling ..... Mechanical
Governor ..... All-speed control, electronic
*EPA Tier 4 Interim and EU stage 3B emissions certified

HYDRAULICS

Type ..... HydrauMind (Hydraulic Mechanical Intelligence New Design) system, closed-center system with load sensing valves and pressure compensated valves
Number of selectable working modes 6
Main pump:
Type ..... Variable displacement piston type
Pumps for ..... Boom, arm, bucket, swing, and travel circuits
Maximum flow ..... 535 ltr/min **141.3 gal/min**
Supply for control circuit ..... Self-reducing valve
Hydraulc motors:
Travel ..... 2 x axial piston motors with parking brake
Swing ..... 1 x axial piston motor with swing holding brake
Relief valve setting:
Implement circuits ..... 37.3 MPa 380 kg/cm² **5,400 psi**
Travel circuit ..... 37.3 MPa 380 kg/cm² **5,400 psi**
Swing circuit ..... 27.9 MPa 285 kg/cm² **4,050 psi**
Pilot circuit ..... 3.2 MPa 33 kg/cm² **470 psi**
Hydraulic cylinders:
(Number of cylinders – bore x stroke x rod diameter)
Boom 2–140 mm x 1480 mm x 100 mm **5.5" x 58.3" x 3.9"**
Arm .... 1–160 mm x 1825 mm x 110 mm **6.3" x 71.9" x 4.3"**
Bucket ..... for 3.2 m **10'5"** and 4.0 m **13'2"** Arms
1–140 mm x 1285 mm x 100 mm **5.5" x 50.6" x 3.9"**
for 2.54 m **8'4"** Arm
1–150 mm x 1285 mm x 110 mm **5.9" x 50.6" x 4.3"**

DRIVES AND BRAKES

Steering control ..... Two levers with pedals
Drive method ..... Hydrostatic
Maximum drawbar pull ..... 290 kN 29570 kg **65,191 lb**
Gradeability ..... 70%, 35°
Maximum travel speed: High ..... 5.5 km/h **3.4 mph**
(Auto-Shift) Mid ..... 4.5 km/h **2.8 mph**
(Auto-Shift) Low ..... 3.2 km/h **2.0 mph**
Service brake ..... Hydraulic lock
Parking brake ..... Mechanical disc brake

SWING SYSTEM

Drive method ..... Hydrostatic
Swing reduction ..... Planetary gear
Swing circle lubrication ..... Grease-bathed
Service brake ..... Hydraulic lock
Holding brake/Swing lock ..... Mechanical disc brake
Swing speed ..... 9.5 rpm
Swing torque ..... 11386 kg•m **82,313 ft lbs**

UNDERCARRIAGE

Center frame ..... X-frame
Track frame ..... Box-section
Seal of track ..... Sealed track
Track adjuster ..... Hydraulic
Number of shoes (each side) 48
Number of carrier rollers (each side) 2
Number of track rollers (each side) 8

COOLANT & LUBRICANT CAPACITY (REFILLING)

Fuel tank ..... 605 ltr **159.8 U.S. gal**
Coolant ..... 37 ltr **9.7 U.S. gal**
Engine ..... 35 ltr **9.2 U.S. gal**
Final drive, each side ..... 9.0 ltr **2.4 U.S. gal**
Swing drive ..... 13.7 ltr **3.6 U.S. gal**
Hydraulic tank ..... 188 ltr **49.7 U.S. gal**
Hydraulic system ..... 365 ltr **96.4 U.S. gal**

OPERATING WEIGHT (APPROXIMATE)

Operating weight includes 6500 mm **21'3"** one-piece HD boom, 3185 mm **10'5"** arm, SAE heaped 1.96 m³ **2.56 yd³** bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.

Triple-Grouser Shoes	Operating Weight	Ground Pressure
700 mm	35,496 kg	0.59 kg/cm²
28"	**78,255 lb**	**8.31 psi**
800 mm	35876 kg	0.52 kg/cm²
31.5"	**79,093 lb**	**7.40 psi**
850 mm	36255 kg	0.50 kg/cm²
33.5"	**79,930 lb**	**7.00 psi**

Component Weights


Arm including bucket cylinder and linkage
3185 mm **10'5"** arm assembly ..... 1761 kg **3,882 lb**
4020 mm **13'2"** arm assembly ..... 1988 kg **4,383 lb**
One piece HD boom including arm cylinder
6500 mm **21'3"** boom assembly ..... 3135 kg **6,912 lb**
Boom cylinders x 2 ..... 259 kg **571 lb**
Counterweight ..... 7090 kg **15,631 lb**
1.96 m³ **2.56 yd³** bucket - 54" width ..... 1554 kg **3,425 lb**


SPECIFICATIONS

DIMENSIONS

	Arm Length	2540 mm	8'4"	3185 mm	10'5"	4020 mm	13'2"
A	Overall length	11180 mm	36'8"	11145 mm	36'7"	11170 mm	36'8"
B	Length on ground (transport)	6760 mm	22'2"	5935 mm	19'6"	5475 mm	18'0"
C	Overall height (to top of boom)*	3410 mm	11'2"	3285 mm	10'9"	3760 mm	12'4"
D	Overall width	3440 mm	11'3"				
E	Overall height (to top of cab)*	3160 mm	10'4"				
F	Overall height (to top of handrail)*	3255 mm	10'8"				
G	Ground clearance, counterweight	1185 mm	3'11"				
H	Ground clearance, minimum	498 mm	1'8"				
I	Tail swing radius	3445 mm	11'4"				
J	Track length on ground	4030 mm	13'3"				
K	Track length	4955 mm	16'3"				
L	Track gauge	2590 mm	8'6"				
M	Width of crawler	3440 mm	11'3"				
N	Shoe width	850 mm	33.5"				
O	Grouser height	36 mm	1.4"				
P	Machine cab height	2750 mm	9'0"				
Q	Machine cab width **	3145 mm	10'4"				
R	Distance, swing center to rear end	3405 mm	11'2"				

* : Including grouser height ** : Including handrail

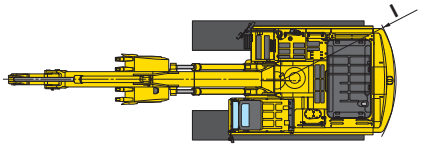

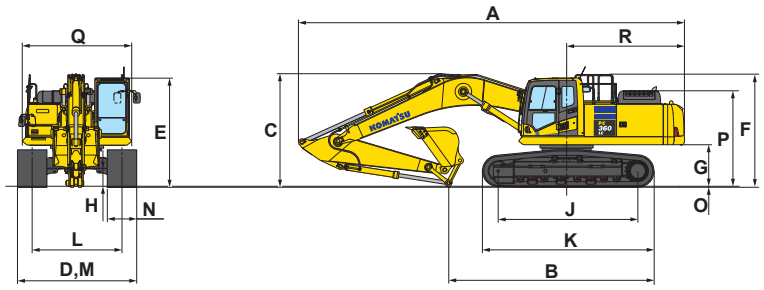


BACKHOE BUCKET, ARM AND BOOM COMBINATION

Bucket Type	Bucket Capacity		Bucket Width		Bucket Weight		6.5 m (21'3") Boom 2.6 m (8'4")	6.5 m (21'3") Boom 3.2 m (10'5")	6.5 m (21'3") Boom 4.0 m (13'2")
Komatsu TL	0.93 m³	1.21 yd³	762 mm	30"	1097 kg	2418 lb	V	V	V
	1.18 m³	1.54 yd³	914 mm	36"	1198 kg	2641 lb	V	V	V
	1.44 m³	1.88 yd³	1067 mm	42"	1325 kg	2921 lb	V	V	V
	1.70 m³	2.22 yd³	1219 mm	48"	1426 kg	3144 lb	V	V	W
	1.96 m³	2.56 yd³	1372 mm	54"	1554 kg	3425 lb	W	W	X
Komatsu HP	0.68 m³	0.89 yd³	610 mm	24"	1022 kg	2254 lb	V	V	V
	0.93 m³	1.21 yd³	762 mm	30"	1178 kg	2598 lb	V	V	V
	1.18 m³	1.54 yd³	914 mm	36"	1358 kg	2993 lb	V	V	V
	1.44 m³	1.88 yd³	1067 mm	42"	1439 kg	3173 lb	V	V	V
	1.70 m³	2.22 yd³	1219 mm	48"	1555 kg	3429 lb	V	V	X
	1.96 m³	2.56 yd³	1372 mm	54"	1701 kg	3750 lb	W	X	Y
Komatsu HPS	0.68 m³	0.89 yd³	610 mm	24"	1112 kg	2451 lb	V	V	V
	0.93 m³	1.21 yd³	762 mm	30"	1294 kg	2853 lb	V	V	V
	1.18 m³	1.54 yd³	914 mm	36"	1437 kg	3167 lb	V	V	V
	1.44 m³	1.88 yd³	1067 mm	42"	1607 kg	3543 lb	V	V	W
	1.70 m³	2.22 yd³	1219 mm	48"	1750 kg	3857 lb	V	W	X
	1.96 m³	2.56 yd³	1372 mm	54"	1921 kg	4236 lb	W	X	Y
Komatsu HPX	0.68 m³	0.89 yd³	610 mm	24"	1239 kg	2731 lb	V	V	V
	0.93 m³	1.21 yd³	762 mm	30"	1421 kg	3133 lb	V	V	V
	1.18 m³	1.54 yd³	914 mm	36"	1564 kg	3447 lb	V	V	V
	1.44 m³	1.88 yd³	1067 mm	42"	1734 kg	3823 lb	V	V	W
	1.70 m³	2.22 yd³	1219 mm	48"	1877 kg	4137 lb	V	W	X
	1.96 m³	2.56 yd³	1372 mm	54"	2048 kg	4516 lb	X	X	Y

V - Used with material weights up to 3,500 lb/yd³
W - Used with material weights up to 3,000 lb/yd³
X - Used with material weights up to 2,500 lb/yd³
Y - Used with material weights up to 2,000 lb/yd³
Z - Not useable


WORKING RANGE

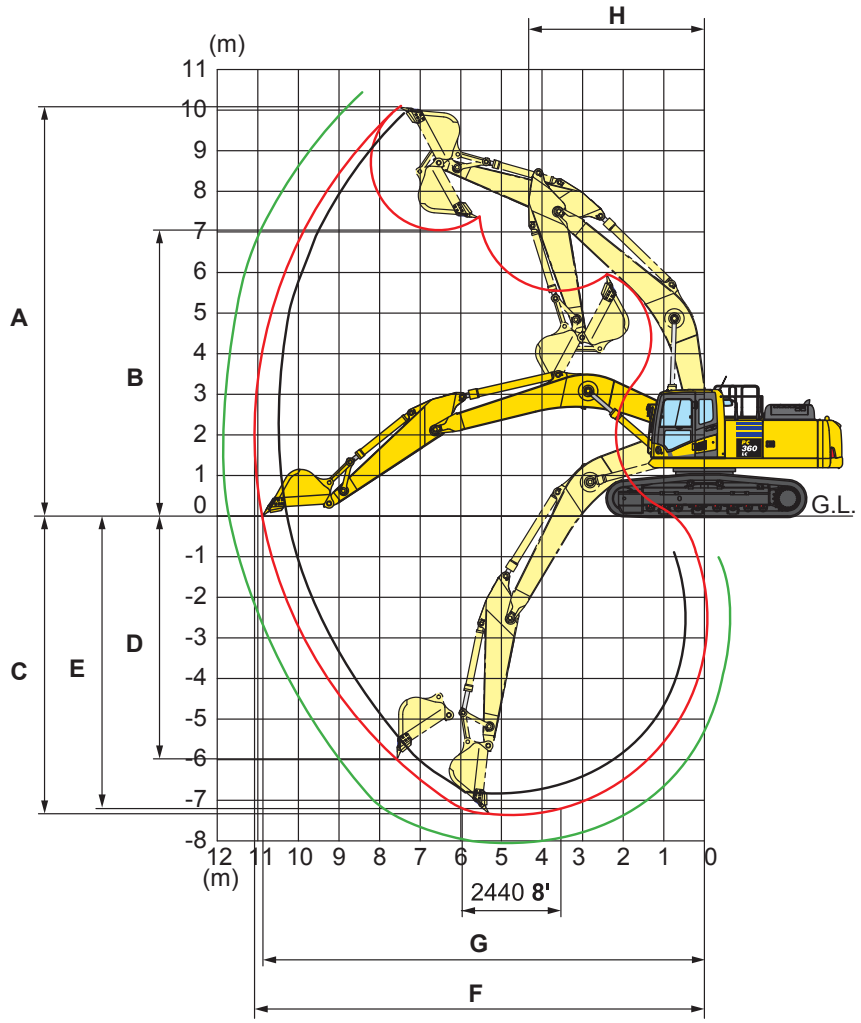

	Arm Length	2540 mm	8'4"	3185 mm	10'5"	4020 mm	13'2"
A	Max. digging height	9965 mm	**32'8"**	10210 mm	**33'6"**	10550 mm	**34'7"**
B	Max. dumping height	6895 mm	**22'7"**	7110 mm	**23'4"**	7490 mm	**24'7"**
C	Max. digging depth	6705 mm	**22'0"**	7380 mm	**24'3"**	8180 mm	**26'10"**
D	Max. vertical wall digging depth	5880 mm	**19'4"**	6480 mm	**21'3"**	7280 mm	**23'11"**
E	Max. digging depth for 8' level bottom	6520 mm	**21'5"**	7180 mm	**23'7"**	8045 mm	**26'5"**
F	Max. digging reach	10550 mm	**34'7"**	11100 mm	**36'5"**	11900 mm	**39'1"**
G	Max. digging reach at ground level	10355 mm	**34'0"**	10920 mm	**35'10"**	11730 mm	**38'6"**
H	Min. swing radius	4400 mm	**14'5"**	4310 mm	**14'2"**	4320 mm	**14'2"**
SAE rating	Bucket digging force at power max.	229 kN 23300 kg / **51,370 lb**		200 kN 20400 kg / **44,970 lb**		200 kN 20400 kg / **44,970 lb**	
	Arm crowd force at power max.	193 kN 19700 kg / **43,430 lb**		165 kN 16800 kg / **37,040 lb**		139 kN 14200 kg / **31,310 lb**	
ISO rating	Bucket digging force at power max.	259 kN 26400 kg / **58,200 lb**		228 kN 23200 kg / **51,150 lb**		227 kN 23100 kg / **50,930 lb**	
	Arm crowd force at power max.	201 kN 20500 kg / **45,190 lb**		171 kN 17400 kg / **38,360 lb**		144 kN 14700 kg / **32,410 lb**	

LIFT CAPACITIES

LIFTING CAPACITY WITH LIFTING MODE

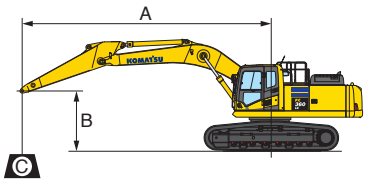


A: Reach from swing center
B: Bucket hook height
C: Lifting capacity
Cf: Rating over front
Cs: Rating over side
⊗ : Rating at maximum reach

Conditions :
- 6500 mm **21' 3"** one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 3185 mm **10'5"** **Shoes:** 800 mm **31.5"** **Unit:** kg **lb**

A / B	3.0 m **10'** Cf	3.0 m **10'** Cs	4.6 m **15'** Cf	4.6 m **15'** Cs	6.1 m **20'** Cf	6.1 m **20'** Cs	7.6 m **25'** Cf	7.6 m **25'** Cs	9.1 m **30'** Cf	9.1 m **30'** Cs	⊗ MAX Cf	⊗ MAX Cs
7.6 m **25'**											* 7250 *** 15900**	* 7250 *** 15900**
6.1 m **20 '**							* 8890 *** 19600**	7600 **16700**			* 7050 *** 15500**	6440 **14200**
4.6 m **15'**					* 10740 *** 23600**	10260 **22600**	* 9370 *** 20600**	7430 **16300**			* 7100 *** 15600**	5750 **12600**
3.0 m **10'**			* 16210 *** 35700**	14630 **32200**	* 12090 *** 26600**	9790 **21500**	* 10030 *** 22100**	7200 **15800**	8240 **18100**	5570 **12200**	* 7380 *** 16200**	5390 **11800**
1.5 m **5'**			* 18180 *** 40000**	13820 **30400**	* 13220 *** 29100**	9370 **20600**	10510 **23100**	6980 **15300**	8120 **17900**	5460 **12000**	7820 **17200**	5260 **11600**
0 m **0'**			* 18550 *** 40900**	13460 **29600**	* 13740 *** 30200**	9100 **20000**	10330 **22700**	6810 **15000**	8040 **17700**	5390 **11800**	7990 **17600**	5360 **11800**
-1.5 m **-5'**	* 13710 *** 30200**	* 13710 *** 30200**	* 17720 *** 39000**	13380 **29500**	* 13480 *** 29700**	8980 **19800**	10240 **22500**	6730 **14800**			8570 **18800**	5710 **12600**
-3.0 m **-10'**	* 20540 *** 45200**	* 20540 *** 45200**	* 15850 *** 34900**	13490 **29700**	* 12300 *** 27100**	9010 **19800**	* 9440 *** 20800**	6780 **14900**			* 8870 *** 19500**	6490 **14300**
-4.6 m **-15'**	* 15670 *** 34500**	* 15670 *** 34500**	* 12560 *** 27600**	* 12560 *** 27600**	* 9590 *** 21100**	9210 **20300**					* 8350 *** 18400**	8250 **18100**

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

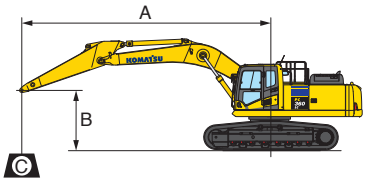

A: Reach from swing center
B: Bucket hook height
C: Lifting capacity
Cf: Rating over front
Cs: Rating over side
⊗ : Rating at maximum reach


Conditions :
- 6500 mm **21' 3"** one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 3185 mm **10'5"** **Shoes:** 850 mm **33.5"** **Unit:** kg **lb**

A / B	3.0 m **10'** Cf	3.0 m **10'** Cs	4.6 m **15'** Cf	4.6 m **15'** Cs	6.1 m **20'** Cf	6.1 m **20'** Cs	7.6 m **25'** Cf	7.6 m **25'** Cs	9.1 m **30'** Cf	9.1 m **30'** Cs	⊗ MAX Cf	⊗ MAX Cs
7.6 m **25'**											* 7250 *** 15900**	* 7250 *** 15900**
6.1 m **20 '**							* 8890 *** 19600**	7630 **16800**			* 7050 *** 15500**	6470 **14200**
4.6 m **15'**					* 10740 *** 23600**	10300 **22700**	* 9370 *** 20600**	7460 **16400**			* 7100 *** 15600**	5770 **12700**
3.0 m **10'**			* 16210 *** 35700**	14690 **32300**	* 12090 *** 26600**	9830 **21600**	* 10030 *** 22100**	7230 **15900**	8280 **18200**	5590 **12300**	* 7380 *** 16200**	5410 **11900**
1.5 m **5'**			* 18180 *** 40000**	13880 **30600**	* 13220 *** 29100**	9410 **20700**	10560 **23200**	7010 **15400**	8160 **18000**	5490 **12100**	7850 **17300**	5290 **11600**
0 m **0'**			* 18550 *** 40900**	13520 **29800**	* 13740 *** 30200**	9140 **20100**	10380 **22800**	6840 **15000**	8080 **17800**	5410 **11900**	8030 **17700**	5380 **11800**
-1.5 m **-5'**	* 13710 *** 30200**	* 13710 *** 30200**	* 17720 *** 39000**	13450 **29600**	* 13480 *** 29700**	9020 **19900**	10290 **22700**	6770 **14900**			8610 **18900**	5740 **12600**
-3.0 m **-10'**	* 20540 *** 45200**	* 20540 *** 45200**	* 15850 *** 34900**	13550 **29800**	* 12300 *** 27100**	9050 **19900**	* 9440 *** 20800**	6810 **15000**			* 8870 *** 19500**	6520 **14300**
-4.6 m **-15'**	* 15670 *** 34500**	* 15670 *** 34500**	* 12560 *** 27600**	* 12560 *** 27600**	* 9590 *** 21100**	9260 **20400**					* 8350 *** 18400**	8290 **18200**

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

LIFTING CAPACITY WITH LIFTING MODE

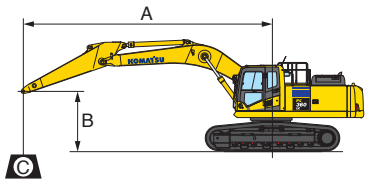


A: Reach from swing center
B: Bucket hook height
C: Lifting capacity
Cf: Rating over front
Cs: Rating over side
⊗: Rating at maximum reach

Conditions :
- 6500 mm **21' 3"** one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 4020 mm **13'2"** **Shoes:** 800 mm **31.5"** **Unit:** kg **lb**

A / B	3.0 m 10' Cf	3.0 m 10' Cs	4.6 m 15' Cf	4.6 m 15' Cs	6.1 m 20' Cf	6.1 m 20' Cs	7.6 m 25' Cf	7.6 m 25' Cs	9.1 m 30' Cf	9.1 m 30' Cs	⊗ MAX Cf	⊗ MAX Cs
7.6 m							* 7750	* 7750			* 5610	* 5610
25'							* **17000**	* **17000**			* **12300**	* **12300**
6.1 m							* 7950	7680	* 6550	5740	* 5460	* 5460
20 '							* **17500**	**16900**	* **14400**	**12600**	* **12000**	* **12000**
4.6 m							* 8520	7470	* 7870	5660	* 5470	4980
15'							* **18700**	**16400**	* **17300**	**12400**	* **12000**	**10900**
3.0 m			* 14340	* 14340	* 11020	9870	* 9280	7190	8210	5520	* 5640	4700
10'			* **31600**	* **31600**	* **24300**	**21700**	* **20400**	**15800**	**18100**	**12100**	* **12400**	**10300**
1.5 m			* 16890	13900	* 12370	9350	* 10010	6900	8040	5370	* 5950	4590
5'			* **37200**	**30600**	* **27200**	**20600**	* **22000**	**15200**	**17700**	**11800**	* **13100**	**10100**
0 m	* 8320	* 8320	* 18090	13270	* 13230	8960	10200	6670	7910	5240	* 6480	4640
0'	* **18300**	* **18300**	* **39800**	**29200**	* **29100**	**19700**	**22500**	**14700**	**17400**	**11500**	* **14200**	**10200**
-1.5 m	* 12420	12420	* 17980	13030	* 13400	8740	10050	6530	7840	5180	* 7330	4890
-5'	* **27300**	**27300**	* **39600**	**28700**	* **29500**	**19200**	**22100**	**14400**	**17200**	**11400**	* **16100**	**10700**
-3.0 m	* 17840	* 17840	* 16780	13030	* 12760	8700	* 10020	6510			* 8040	5410
-10'	* **39300**	* **39300**	* **37000**	**28700**	* **28100**	**19100**	* **22000**	**14300**			* **17700**	**11900**
-4.6 m	* 19190	* 19190	* 14360	13230	* 11040	8810	* 8190	6640			* 7850	6480
-15'	* **42300**	* **42300**	* **31600**	**29100**	* **24300**	**19400**	* **18000**	**14600**			* **17300**	**14300**

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

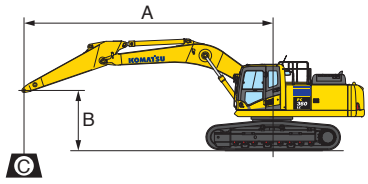

A: Reach from swing center
B: Bucket hook height
C: Lifting capacity
Cf: Rating over front
Cs: Rating over side
⊗: Rating at maximum reach

Conditions :
- 6500 mm **21' 3"** one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 4020 mm **13'2"** **Shoes:** 850 mm **33.5"** **Unit:** kg **lb**

A / B	3.0 m 10' Cf	3.0 m 10' Cs	4.6 m 15' Cf	4.6 m 15' Cs	6.1 m 20' Cf	6.1 m 20' Cs	7.6 m 25' Cf	7.6 m 25' Cs	9.1 m 30' Cf	9.1 m 30' Cs	⊗ MAX Cf	⊗ MAX Cs
7.6 m							* 7750	* 7750			* 5610	* 5610
25'							* **17000**	* **17000**			* **12300**	* **12300**
6.1 m							* 7950	7720	* 6550	5770	* 5460	* 5460
20 '							* **17500**	**17000**	* **14400**	**12700**	* **12000**	* **12000**
4.6 m							* 8520	7500	* 7870	5690	* 5470	5010
15'							* **18700**	**16500**	* **17300**	**12500**	* **12000**	**11000**
3.0 m			* 14340	* 14340	* 11020	9910	* 9280	7220	* 8220	5550	* 5640	4720
10'			* **31600**	* **31600**	* **24300**	**21800**	* **20400**	**15900**	* **18100**	**12200**	* **12400**	**10400**
1.5 m			* 16890	13960	* 12370	9390	* 10010	6940	8080	5400	* 5950	4610
5'			* **37200**	**30700**	* **27200**	**20700**	* **22000**	**15300**	**17800**	**11900**	* **13100**	**10100**
0 m	* 8320	* 8320	* 18090	13330	* 13230	9000	10250	6710	7950	5270	* 6480	4660
0'	* **18300**	* **18300**	* **39800**	**29400**	* **29100**	**19800**	**22600**	**14700**	**17500**	**11600**	* **14200**	**10200**
-1.5 m	* 12420	* 12420	* 17980	13090	* 13400	8790	10100	6570	7880	5200	* 7330	4910
-5'	* **27300**	* **27300**	* **39600**	**28800**	* **29500**	**19300**	**22200**	**14400**	**17300**	**11400**	* **16100**	**10800**
-3.0 m	* 17840	* 17840	* 16780	13090	* 12760	8740	10020	6540			* 8040	5440
-10'	* **39300**	* **39300**	* **37000**	**28800**	* **28100**	**19200**	**22000**	**14400**			* **17700**	**11900**
-4.6 m	* 19190	* 19190	* 14360	13290	* 11040	8860	8190	6670			* 7850	6520
-15'	* **42300**	* **42300**	* **31600**	**29300**	* **24300**	**19500**	**18000**	**14700**			* **17300**	**14300**

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.

PC360LC-10

STANDARD EQUIPMENT

- Alternator, 60 Ampere, 24 V
- AM/FM radio
- Automatic engine warm-up system
- Automatic air conditioner/heater
- Auxiliary input (3.5mm jack)
- Batteries, large capacity
- Battery disconnect switch
- Boom and arm holding valves
- Converter, (2) x 12 V
- Counterweight, 7090 kg **15,631 lb**
- Dry type air cleaner, double element
- Electric horn
- EMMS monitoring system
- Engine, Komatsu SAA6D114E-5
- Engine overheat prevention system
- Extended work equipment grease interval
- Fan guard structure
- Fuel system pre-cleaner 10 micron
- High back air suspension seat, with heat
- Hydraulic track adjusters
- KOMTRAX® Level 4.0
- Large LCD color monitor, high resolution
- Lock lever
- Mirrors, (LH and RH)
- Operator Protective Top Guard (OPG), Level 1
- Pattern change valve (ISO to BH control)
- Power maximizing system
- PPC hydraulic control system
- Pump/engine room partition cover
- Radiator and oil cooler dustproof net
- Rear reflectors
- Rearview monitoring system (1 camera)
- Revolving frame deck guard
- Revolving frame undercovers
- ROPS cab
- Seat belt, retractable, 76 mm **3"**
- Seat belt indicator
- Secondary engine shutoff switch
- Service valve
- Shoes, triple grouser, 800 mm **31.5"**
- Skylight
- Slip resistant foot plates
- Starter motor, 11.0 kW/24 V x 1
- Suction fan
- Thermal and fan guards
- Track frame undercover
- Travel alarm
- Working lights, 2 (boom and RH front)
- Working mode selection system

OPTIONAL EQUIPMENT

- (1) additional rearview camera
- Arms
  - 2540 mm **8'4"** arm assembly
  - 3185 mm **10'5"** arm assembly
  - 3185 mm **10'5"** arm assembly with piping
  - 4020 mm **13'2"** arm assembly
  - 4020 mm **13'2"** arm assembly with piping
- Booms
  - 6500 mm **21'3"** HD boom assembly
  - 6500 mm **21'3"** HD boom assembly with piping
- Cab guards
  - Full front guard, OPG Level 1
  - Full front guard, OPG Level 2
  - Bolt-on top guard, OPG Level 2
  - Lower front window guard
- High pressure in-line hydraulic filters
- Hydraulic control unit, 1 actuator
- Rain visor
- Revolving frame undercovers, heavy duty
- Revolving frame undercovers, severe duty
- Shoes, triple grouser, 700 mm **28"**
- Shoes, single grouser, 800 mm **31.5"**
- Shoes, triple grouser, 850 mm **33.5"**
- Sun visor
- Straight travel pedal
- Track roller guards, full length
- Working light, front, one additional

ATTACHMENT OPTIONS

- Cab air pre-cleaner
- Grade control systems
- Hydraulic couplers
- Hydraulic kits, field installed
- Load holding valves
- PSM thumbs
- Rockland thumbs
- Super long fronts
- Vandalism protection guards with storage box

For a complete list of available attachments, please contact your local Komatsu distributor.

AESS819-02
©2013 Komatsu America Corp.
Printed in USA AD10(2.5M)CCi 10/13 (EV-1)

KOMATSU®

www.komatsuamerica.com

Komatsu America Corp. is an authorized licensee of Komatsu Ltd.
Materials and specifications are subject to change without notice
KOMATSU® is a registered trademark of Komatsu Ltd., Japan
KOMTRAX® is a registered trademark of Komatsu America Corp.