

SPECIFICATIONS

Model				KX080-4S	KX080-4S Angle Blade
Type of cabin				ROPS / OPG (TOP Guard, Level I)	
Type of tracks				Rubber / Steel	
Engine	Model			Kubota V3307-CR-TE4	
	Output (SAE J1995 gross)		HP (kW)/rpm	66.6 (49.7) / 2000	
	Output (SAE J1349 net)		HP (kW)/rpm	62.3 (46.5) / 2000	
	Displacement		cu. in. (cc)	203.3 (3331)	
Dimensions	Overall length		ft. in. (mm)	21'1.9" (6450)	
	Overall height		ft. in. (mm)	8'4" (2540)	
	Overall width		ft. in. (mm)	7'2.6" (2200)	
	Min. ground clearance		in. (mm)	14.0 (355)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	22.3 (84.6) Variable × 2	
	Auxiliary hydraulic flow		GPM (ℓ/min)	26.4 (100) / 17.6 (66.6)	
	Max. breakout force	Bucket / Arm	lbf. (kgf)	14660 (6650) / 8554 (3880)	
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 3.0 (4.8)	
	Max. traction force	Low speed	lbf. (kgf)	14878 (6750)	
	Tumbler distance		ft. in. (mm)	7'6.6" (2300)	
	Crawler length		ft. in. (mm)	9'6.2" (2900)	
	Shoe width	Rubber / Steel	in. (mm)	17.7" (450) / 17.7" (450) (opt. 24" (610))	
	Ground contact pressure	Rubber / Steel	psi (kgf/cm^2)	5.25 (0.369) / 5.36 (0.378)	5.49 (0.386) / 5.63 (0.396)
Swing system	Unit swing speed		rpm	10.2	
	Boom swing angle	Left / Right	degree	70 / 60	
Blade	Dimensions	Width	ft. in. (mm)	7'2.6" (2200)	
		Height	ft. in. (mm)	1'7.7" (500)	1'8.1" (510)
	Max. lift above ground		in. (mm)	19.7" (500)	22.8" (580)
	Max. drop below ground		in. (mm)	19.7" (500)	25.2" (640)
	Angle		degree	—	25
Hydraulic oil (reservoir / system)			gal (ℓ)	19.8 (75) / 35.7 (135)	
Fuel reservoir			gal (ℓ)	30.4 (115)	
Operating weight (Including operator's weight @165 lbs.)		Rubber / Steel	lbs. (kg)	18365 (8330) / 18475 (8380)	19225 (8720) / 19335 (8770)

DIMENSIONS

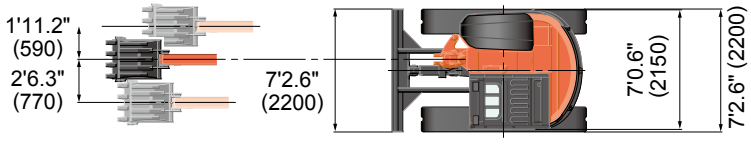

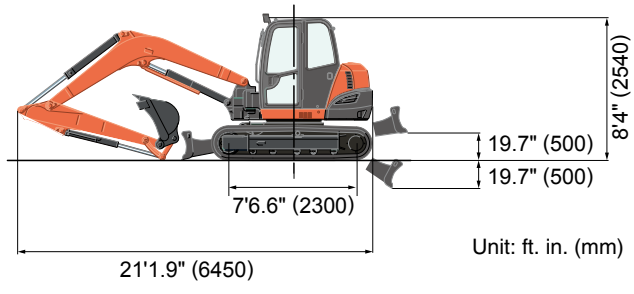

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

©2016 Kubota Corporation

Kubota®

KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503
Western Division: 1175 S. Guild Ave., Lodi, CA 95240 Tel (209) 334-9910
Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900
Northern Division: 6300 at One Kubota Way, Groveport, OH 43125 Tel (614) 835-1100
Southeast Division: 1025 Northbrook Parkway, Suwanee, GA 30024 Tel (770) 995-8855

Visit our web site at: www.kubota.com

ROPS SEATBELT
PUT 'EM ON — KEEP 'EM ON
SAFETY
IT'S THE WAY TO LIVE!®

Cat. No.8870-01-US Printed in Japan '16-08D. <2>50