Now with
Higher Lift Capacity

New
60 HP
Model 5060 E



Also available with
JDLink™

Now warranty on tractor
2+3 Years
2000 + 3000 hours*

*Conditions apply.

...The Next Generation Tractor Technology



Tilt Steering
For operator comfort adjustable up to 25° tilt, with lock latch



EQRL
Easy hitching and usage of implement through EQRL switches



Smart Brakes
Self adjusting, self equalising, hydraulically actuated, oil immersed disc brakes



Hood Lock



Mobile Charging Point With Holder

Zindagi ka Best Decision!™

JOHN DEERE

Technical Specification

ENGINE

Type	:	60 HP (44.7KW), 2400 RPM, 3 Cylinder,Direct injection, Turbo charged,Rotary F.I.P., Coolant cooled with overflow reservoir
Air filter	:	Dry type, dual element

TRANSMISSION

Clutch	:	Dual
Gear Box	:	9 Forward + 3 Reverse
Speeds	:	Forward 2.3 to 32.8 kmph Reverse 3.9 to 25.4 kmph

BRAKES

Self Adjusting, Self equalising,
Hydraulically Actuated, oil immersed disk brakes

HYDRAULICS

Maximum Lifting capacity	:	2000 kgf
3 Point linkage	:	Category II

Automatic depth & draft control

STEERING

Type	:	Power
Steering Column	:	Tiltable up to 25° with lock latch

POWER TAKE OFF

Type	:	Independent , 6 splines
RPM	:	540 @ 2376 ERPM

FUEL TANK CAPACITY

: 68 L

WHEELS AND TYRES

Front	:	6.5 X 20 (0.17m X 0.51m), 8 PR
Rear	:	16.9 X 30 (0.43 X 0.76m), 12 PR

ELECTRICAL SYSTEM

88Ah, 12 V battery
40 Amp. alternator
2.5 kW starter motor

DIMENSIONS AND WEIGHT OF TRACTOR

Total weight	:	2130 kg
Wheel base	:	2050 mm
Overall length	:	3540 mm
Overall width	:	1885 mm
Ground clearance	:	470 mm
Turning radius with brakes	:	3181 mm

ACCESSORIES

• Ballast Weight • Canopy • Canopy Holder
• Wagon Hitch • Drawbar

OPTIONS



- Adjustable front axle
- Roll over protection system (ROPS) with deluxe seat and seat belt
- Heavy duty front axle
- Reverse PTO- (Std + Reverse)
- Dual PTO- (Std + Economy)
- EQRL System
- Synchromesh Transmission- (TSS)
- Selective Control Valve (SCV)


Note: Some of the options may not be available in all combinations. For variants please check with your nearest dealer.

ADDITIONAL FEATURES

- Single Piece Hood with Gas Strut Mechanism
- Side Bar, Exhaust Muffler Guard & Finger Guard
- Water Bottle Holder
- Mobile Holder

Also available with PR transmission and 4WD

New
60 HP
Model 5060 E

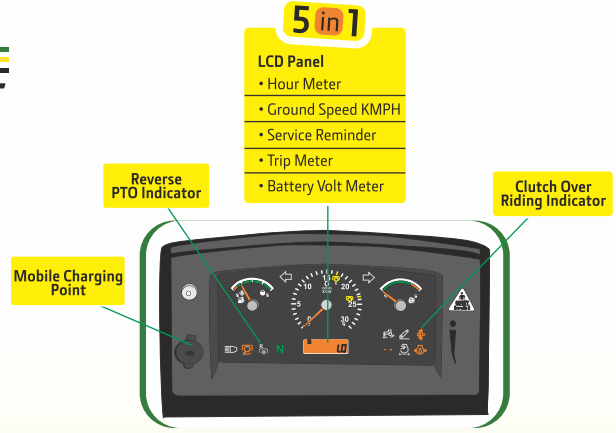

MFD
Multi Function Display



Dry type air filter
Ease of maintenance and longer engine life



Planetary Gear with Straight Axle



Oil jet for piston cooling



Go Home Feature
Reach home safely in the dark



High torque reserve
More productivity



Top Shaft Lubrication

5060 E 05 0518 ENG

John Deere Genuine Parts

I Economical I Reliable I
I Easily available I



For more information, please contact our authorised dealer or nearest area office.

John Deere India Private Limited
3rd floor, Tower-15, Cybercity, Magarpatta City,
Hadapsar, Pune - 411013. Maharashtra.

Please note: Improvement in the product is a continuous process.
Hence the information given in this brochure is subject to change without prior notice.
Accessories shown are not the part of standard equipment.

JOHN DEERE

• Tractors • Farm Equipment • Finance

www.JohnDeere.co.in